


Geberit AquaClean Tuma Classic WC enhancement solution

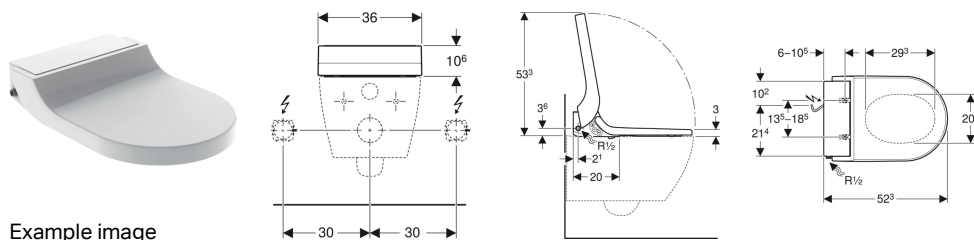

Example image

Application purposes

- For convenient toilet use
- For gently cleaning the anal area with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

Characteristics

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Spray arm with nozzle can be extended for anal area
- Spray intensity can be set to five different levels
- Oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077
- Compatible with Geberit Home App
- Shower water temperature can be adjusted via Geberit Home App

Scope of delivery

- Reinforced braided hose 3/8" with bend 1/2"
- Spray shield
- Fastening material
- Compensation pad for WC seat / ceramic appliance
- Descaling agent, 125 ml

To order additionally

- Water supply connection set

Art. no. **Colour / surface**

146.078.11.1 white alpine

- Continuous flow heater can be deactivated via Geberit Home App
- Spray arm can be set to five different positions via Geberit Home App

Technical data

Protection degree	IPX4
Protection class	I
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption	2000 W
Power consumption standby	≤ 0.5 W
Cable length	2 m
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Water temperature, factory setting	37 °C
Calculated flow rate	0.02 l/s
Minimum flow pressure for calculated flow rate	0.5 bar
Spray time	50 s
Maximum load WC seat	150 kg



• This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found in the appendix or at www.geberit.com.

- Choose water supply connection set according to the installation type
- For ceramic compability please contact Geberit AquaClean 0800 032 9629 to request a template