


Geberit AquaClean 4000 WC enhancement solution



Example image

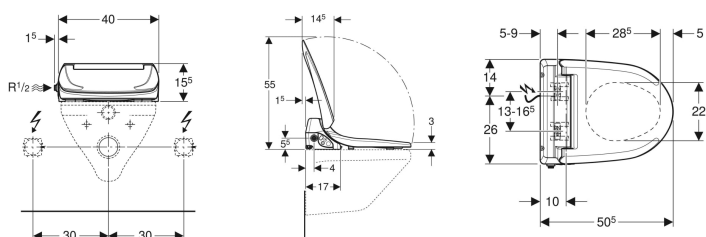

Application purposes

- For convenient toilet use
- For gently cleaning the anal area with water
- For subsequent mounting on WC ceramic appliances (replaces WC seat)

Characteristics

- WC seat ring and WC lid with soft-closing mechanism
- Integrated storage water heater
- Spray arm with nozzle can be extended for anal area
- Spray intensity can be set to five different levels
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Shower spray gradually cools down continuously during shower procedure
- Adjustable storage water heater operating mode (ON/OFF/economy mode)
- User detection for water heating
- Most recently used settings are stored automatically
- Water supply connection on the left
- Mains connection at rear, with hidden pipe-laying option to the left or right
- Mains connection cable can be cut to length

- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

Technical data

Protection degree	IPX4
Protection class	I
Nominal voltage	230 V AC
Mains frequency	50-60 Hz
Power consumption	800 W
Power consumption standby / with heating switched on	0.45/5.8 W
Cable length	2 m
Flow pressure	0.5-10 bar
Operating temperature	10-40 °C
Water temperature, factory setting	37 °C
Calculated flow rate	0.04 l/s
Minimum flow pressure for calculated flow rate	0.5 bar
Spray time	20 s
Maximum load WC seat	150 kg

Scope of delivery

- Water supply connection set for left connection, for exposed cistern
- Spray shield
- Compensation pad for WC seat / ceramic appliance
- Fastening material

Art. no.	Colour / surface	Plug type
146.132.11.1	white alpine	-

Accessories

- Conversion set for Geberit AquaClean WC enhancement solutions



- For ceramic compability please contact Geberit AquaClean 0800 032 9629 to request a template