


Wall-mounted control panel for Geberit AquaClean

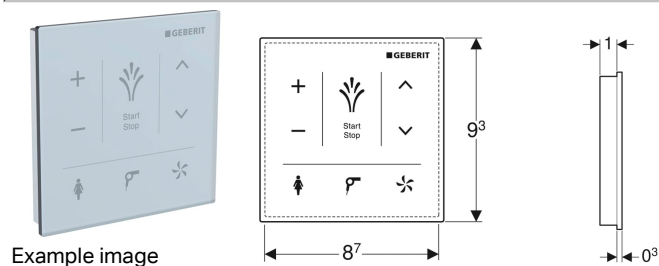

Application purposes

- For manual, wireless operation of the shower toilet functions
- For exposed installation
- For Geberit AquaClean Tuma Comfort
- For Geberit AquaClean Mera WC complete solutions

Characteristics

- Capacitive user interface
- Surface made of glass
- Connection via bluetooth

Scope of delivery

- 3 lithium batteries, type CR 2032

- Power supply by battery
- Warning when the battery is low

Technical data

Battery type	CR2032 (3 V)
Service life, supplied battery	~ 2 years
Protection degree	IPX4
Relative humidity	10-100 %
Operating temperature	5-40 °C

- Fastening material

Art. no.	Colour / surface	B	H
147.038.SI.1	white / glass	9.3 cm	9.3 cm
147.038.SJ.1	black / glass	9.3 cm	9.3 cm