


SYSTEM FOR DRY-WALL CONSTRUCTION VICONNECT

PRODUCT INFORMATION

1 . POSITION



Model	921989
Collection	ViConnect
PROJECTS	 PLUS
Width	525 mm
Height	1120 mm
Depth	98 mm
Weight	8 kg
description	<p>for covering with plasterboard, installation onto a solid brick wall, in dry-wall constructions etc., adjustment range of feet from unfinished floor level to upper edge of finished floor level: 0-200mm, adjustment range front to wall: 135-205mm (when mounted on wall brackets)</p> <p>with wall brackets, installation instructions, with 2 M8 bolts for fastening urinal including protection plugs and chromium-plated protection caps, incl. self-locking feet with adjustable base plates and fastening materials</p> <p>individual packaging materials</p> <p>self-supporting powder-coated steel frame, fully pre-assembled</p> <p>universally adjustable for urinal ceramics, with DN 50 (Ø 50) waste bend and sound-absorbing waste bend clamp, connection kit Ø 25, with flexible metal hose, which can be screwed by hand, with universal cartridge roughing-in set with modifiable water connections for cartridge valve, all crossbars pre-assembled, without urinal cover plate</p> <p>for dry-wall construction, standard height</p>

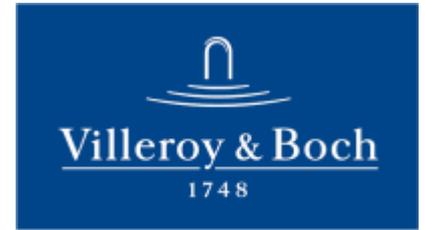

PROJECTS

Specification texts

ViConnect; Urinal installation system; Size: 525 x 1120 x 98 mm; for covering with plasterboard, installation onto a solid brick wall, in dry-wall constructions etc., adjustment range of feet from unfinished floor level to upper edge of finished floor level: 0-200mm, adjustment range front to wall: 135-205mm (when mounted on wall brackets); with wall brackets, installation instructions, with 2 M8 bolts for fastening urinal including protection plugs and chromium-plated protection caps, incl. self-locking feet with adjustable base plates and fastening materials; individual packaging materials; self-supporting powder-coated steel frame, fully pre-assembled; universally adjustable for urinal ceramics, with DN 50 (Ø 50) waste bend and sound-absorbing waste bend clamp, connection kit Ø 25, with flexible metal hose, which can be screwed by hand, with universal cartridge roughing-in set with modifiable water connections for cartridge valve, all crossbars pre-assembled, without urinal cover plate; for dry-wall construction, standard height

COLOURS

92198900 4051202379322

TECHNICAL DRAWINGS

921989

