

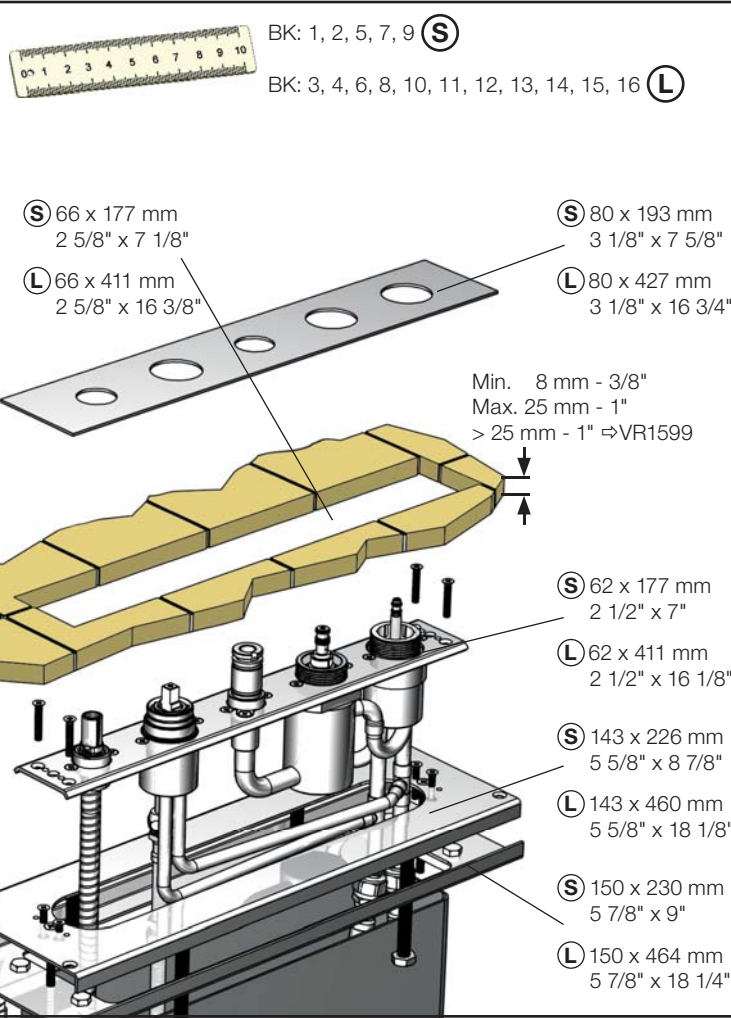
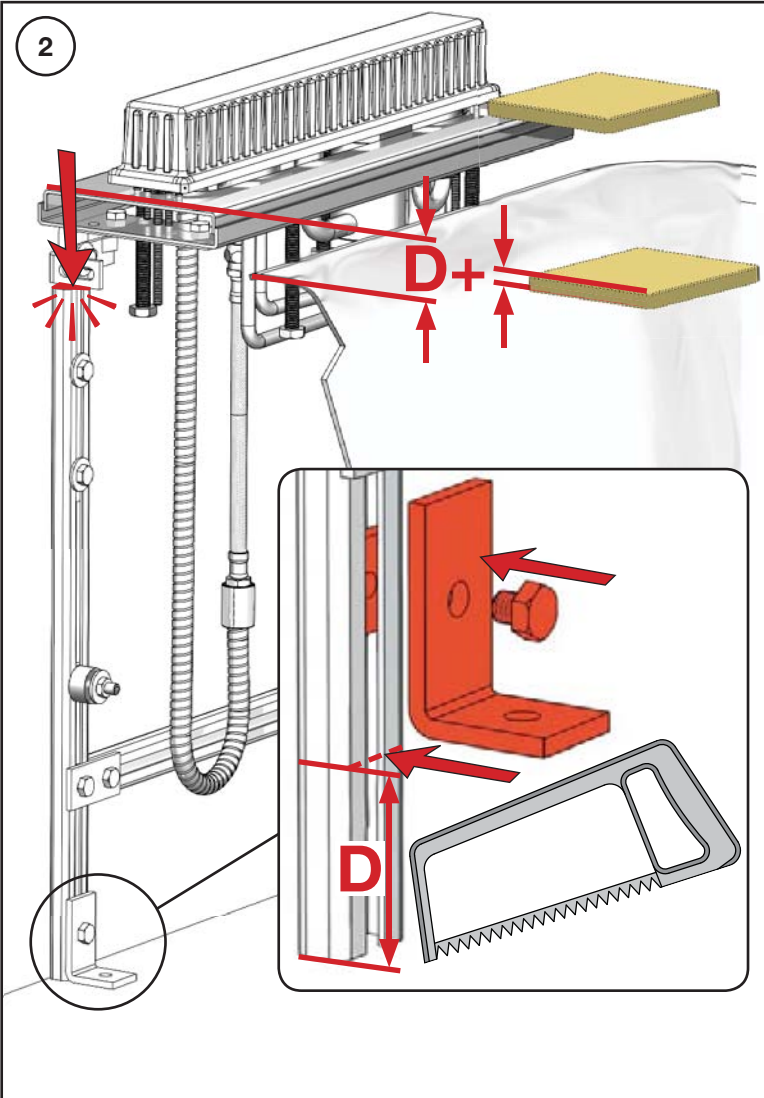
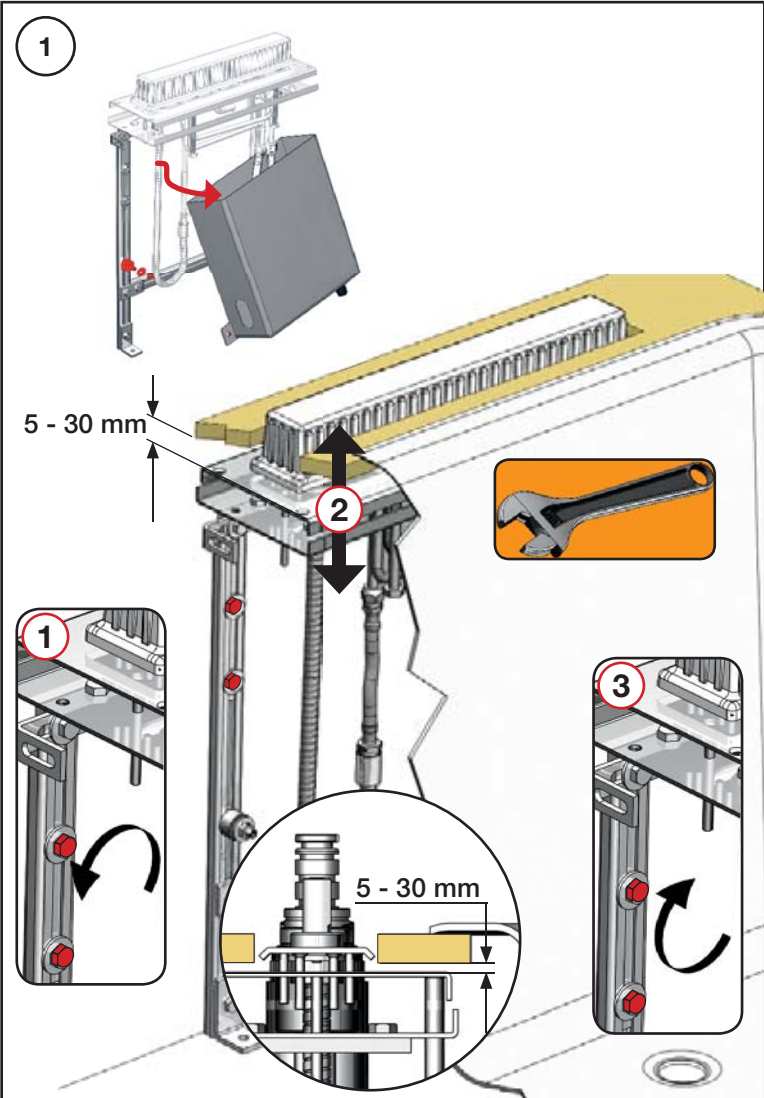
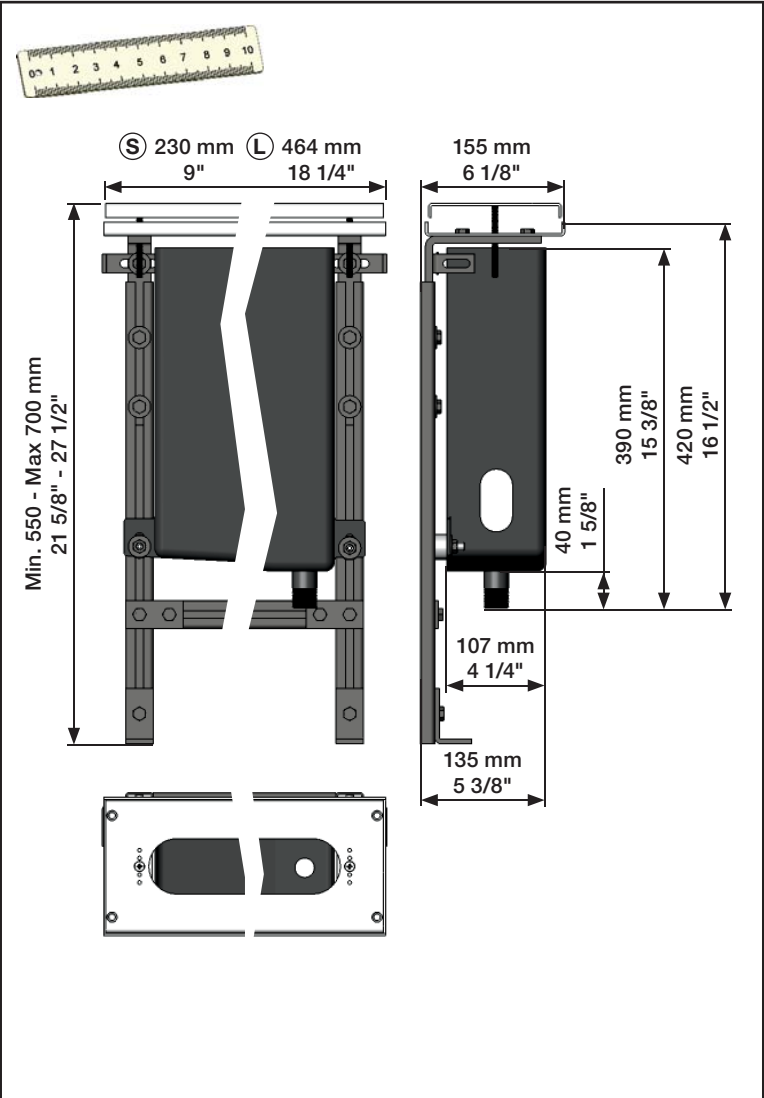
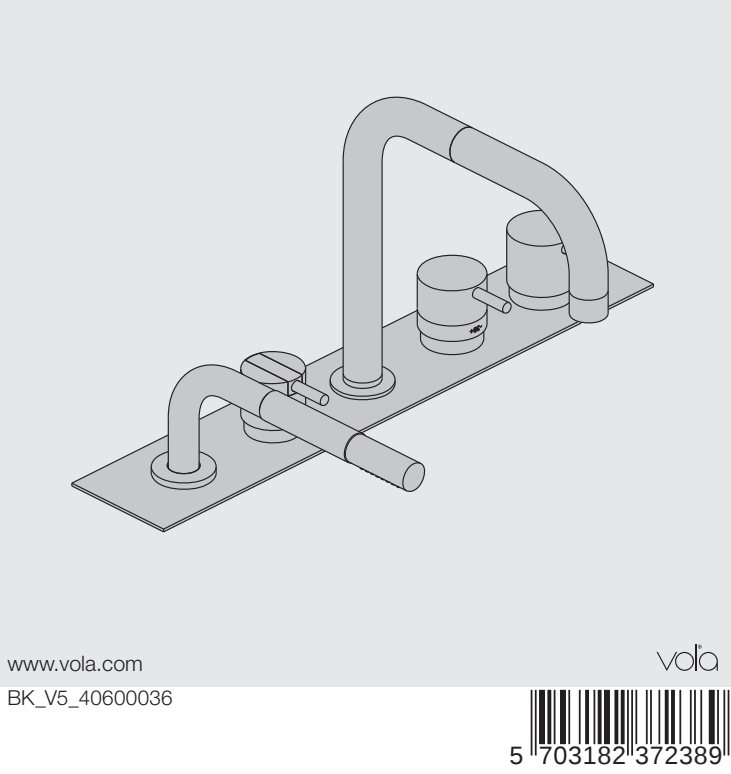



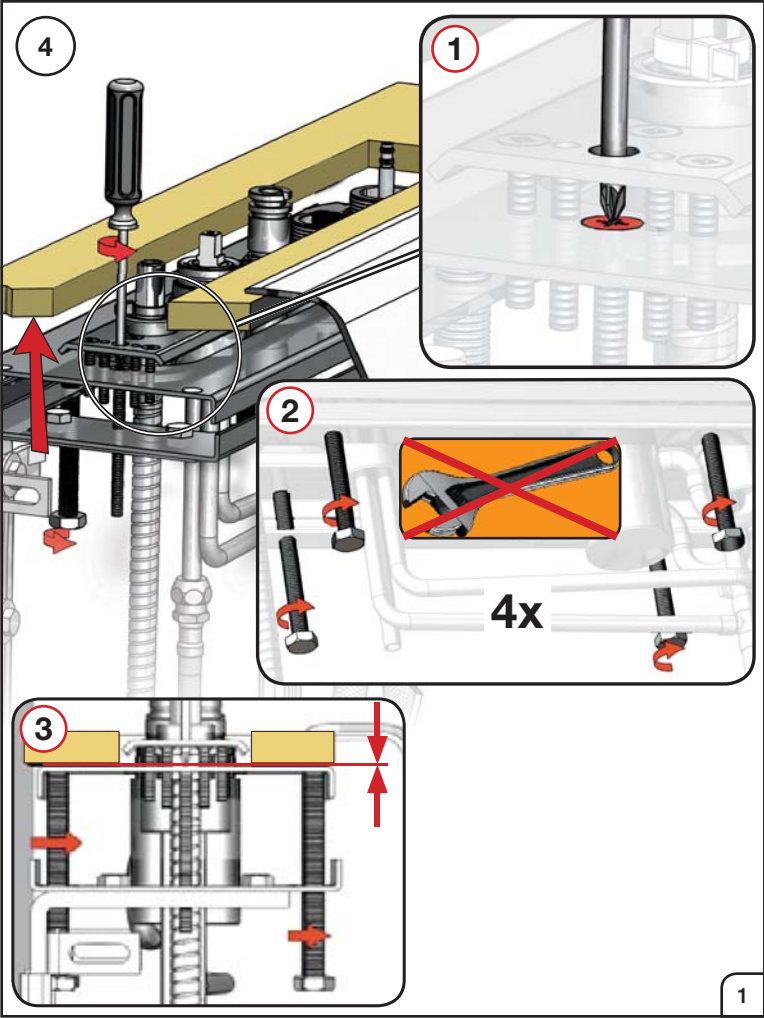


Data, 3 Bar (Max. 10 Bar):





	l/min.	Gal/min.
T1	10	2.6
090D/E	BK 5, 7, 10, 12: 20 BK 6, 8, 11, 13: 25 BK 15, 16: 25	5.3 6.6 6.6
A24	BK 1, 3: 15 BK 2, 4: 19 BK 14: 22	3.9 5.0 5.8

Max. 65°C, 150°F

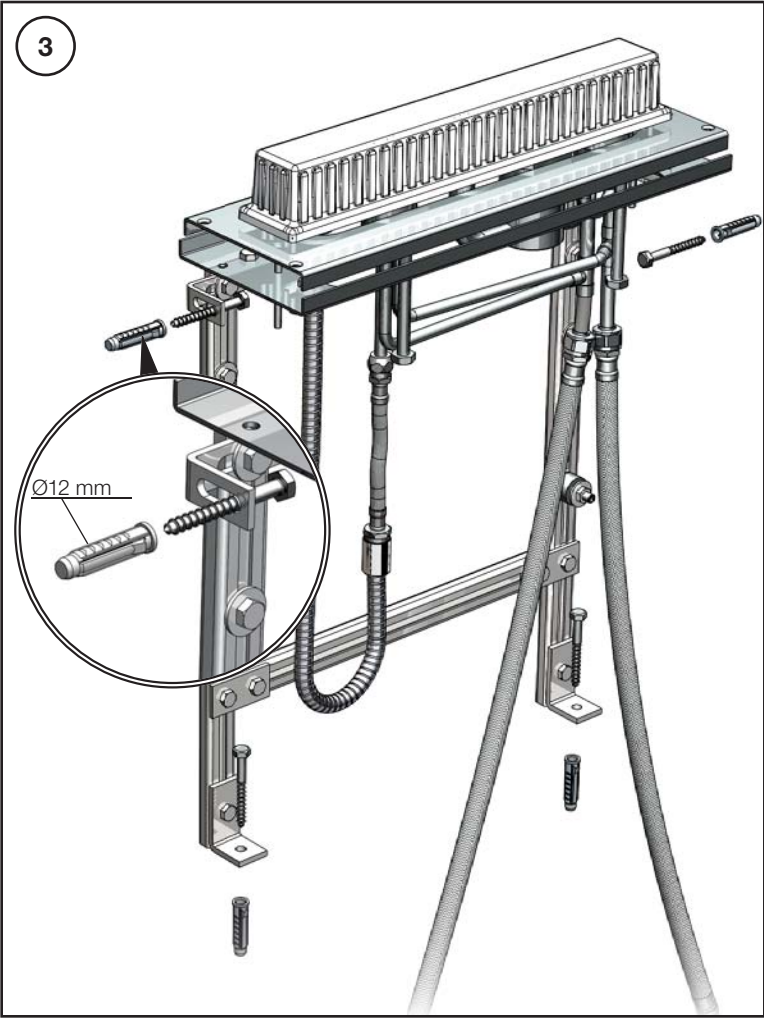












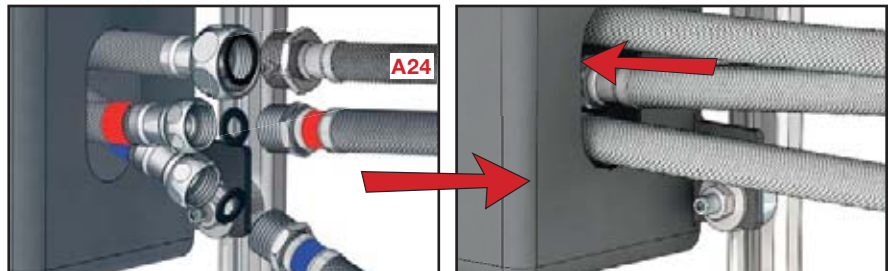
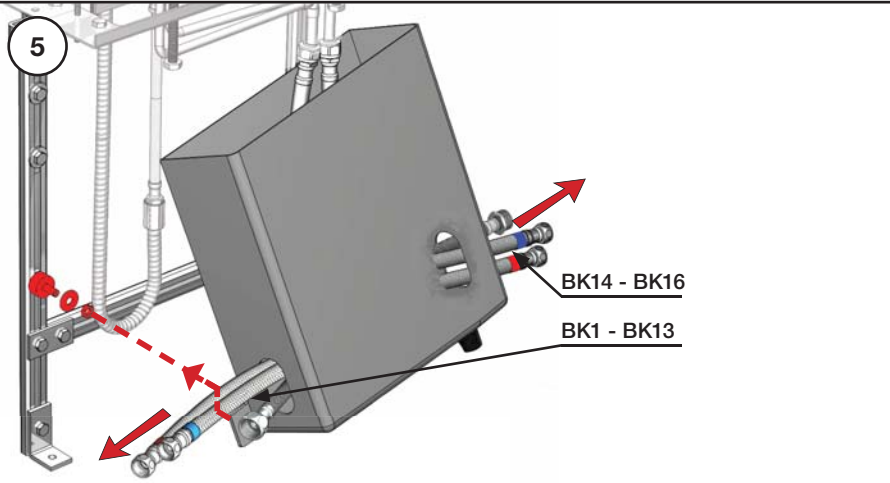



A24 + BK1, BK2, BK3, BK4, BK14:

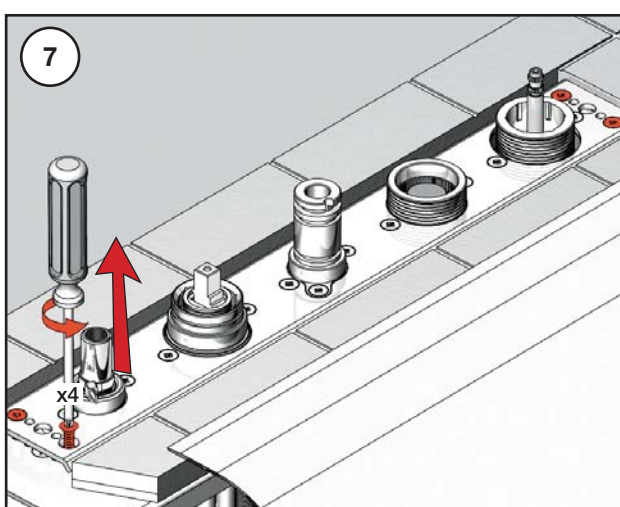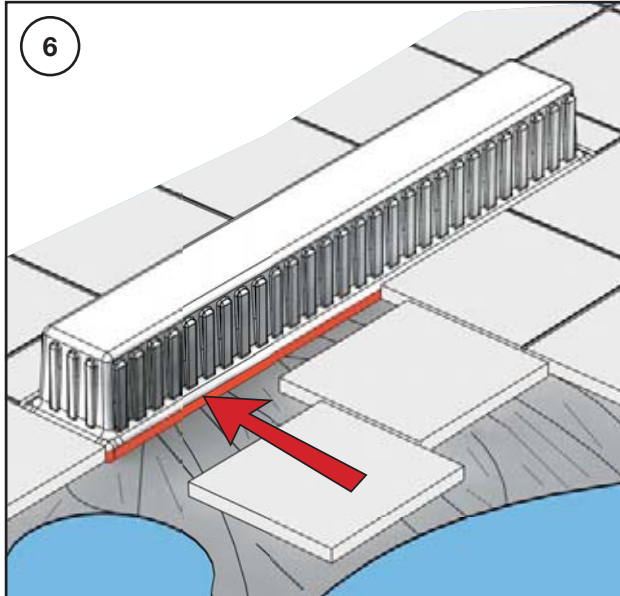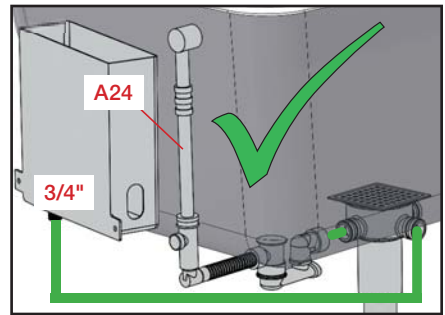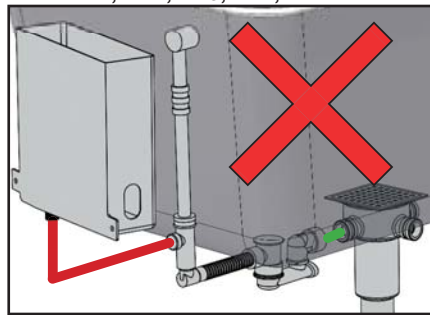


Fitting of trim
Montage von Aufputzteilen
Montage van de afbouwdelen

Montering af greb
Montering af greb
Montage des parties visibles

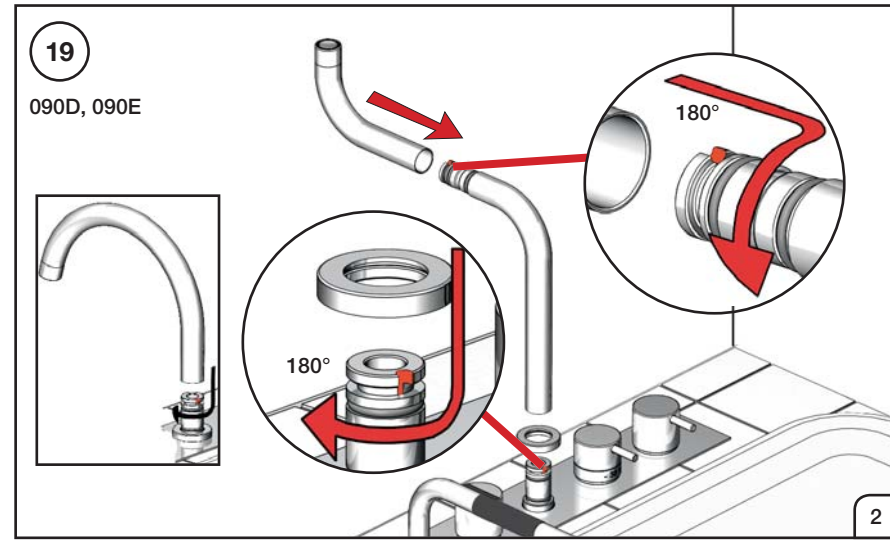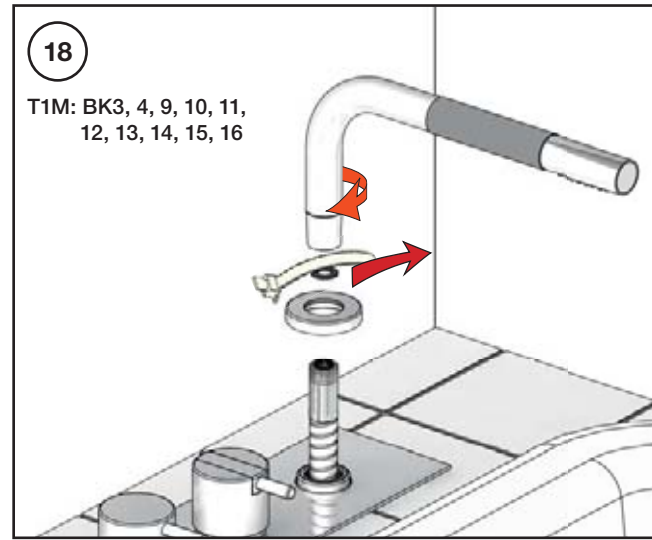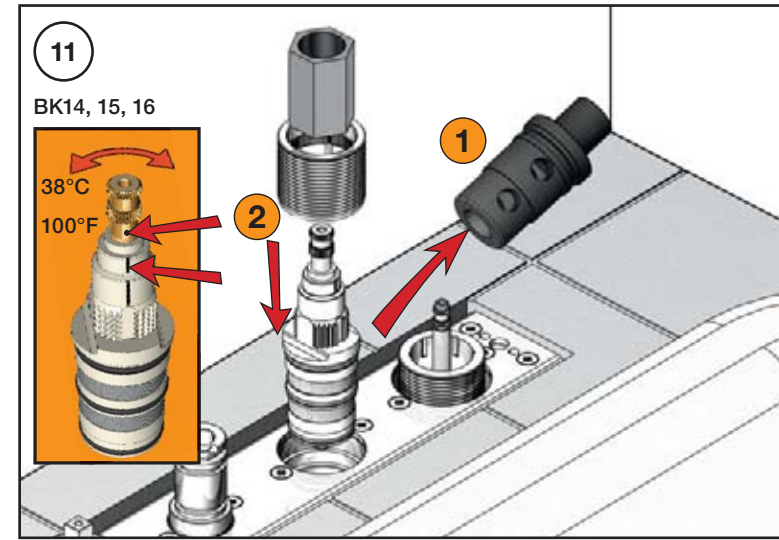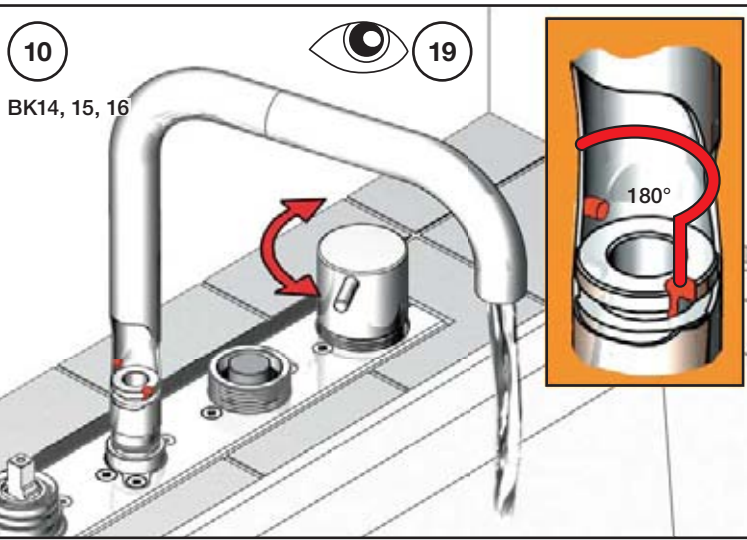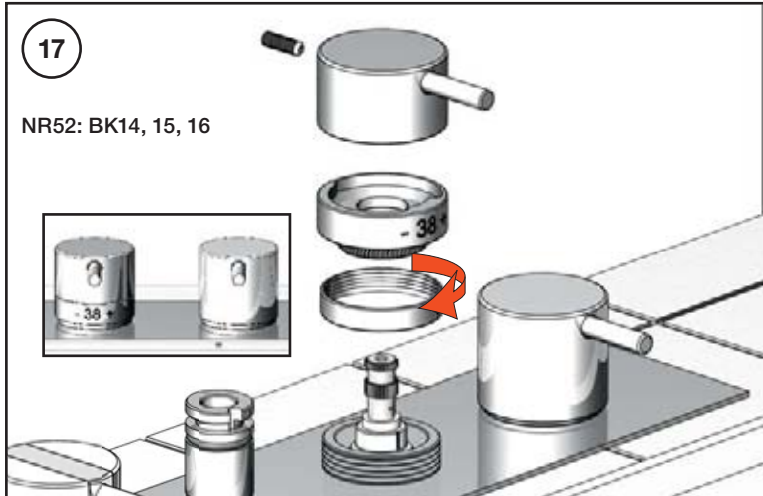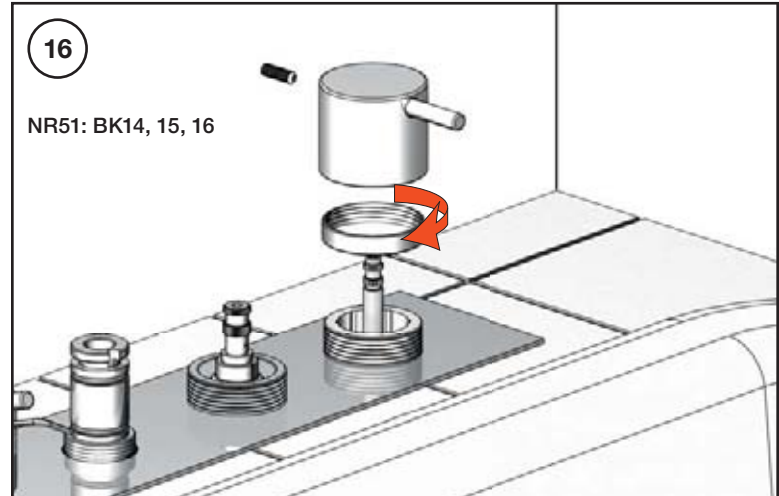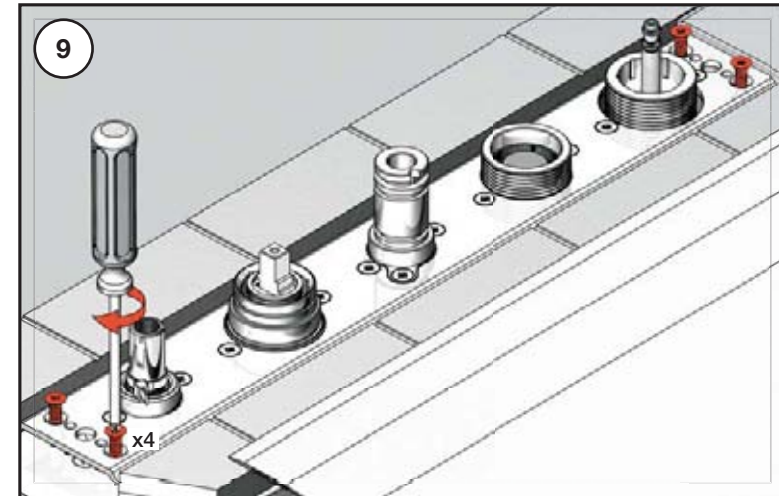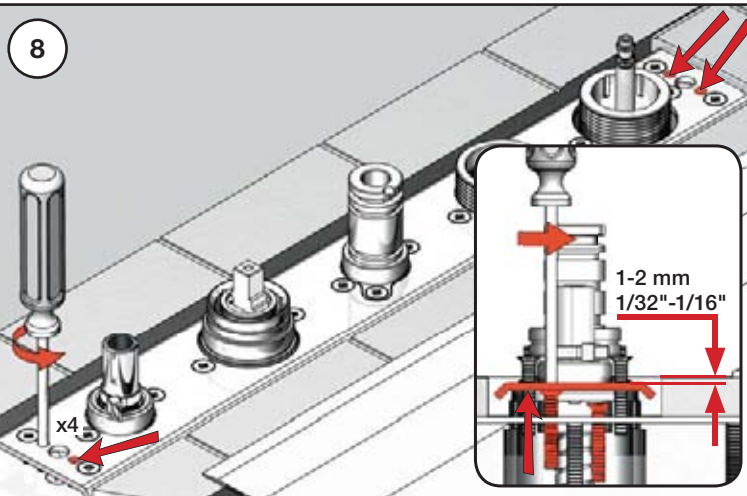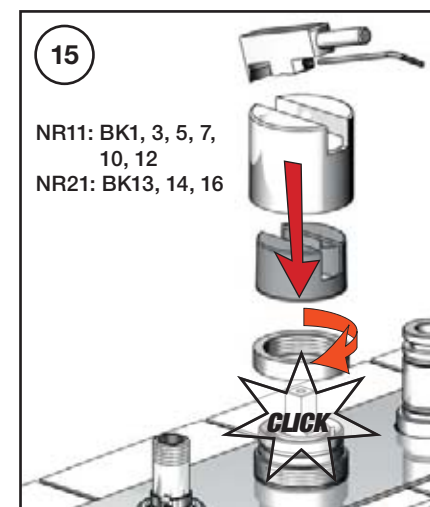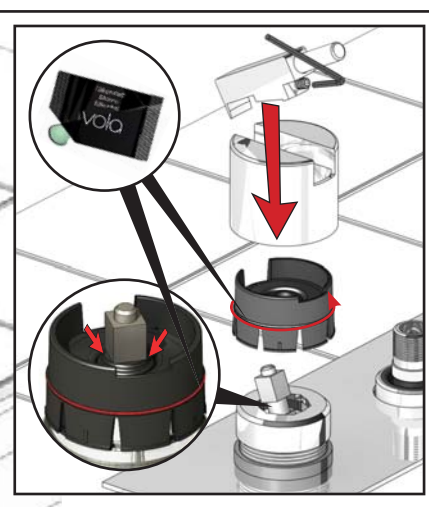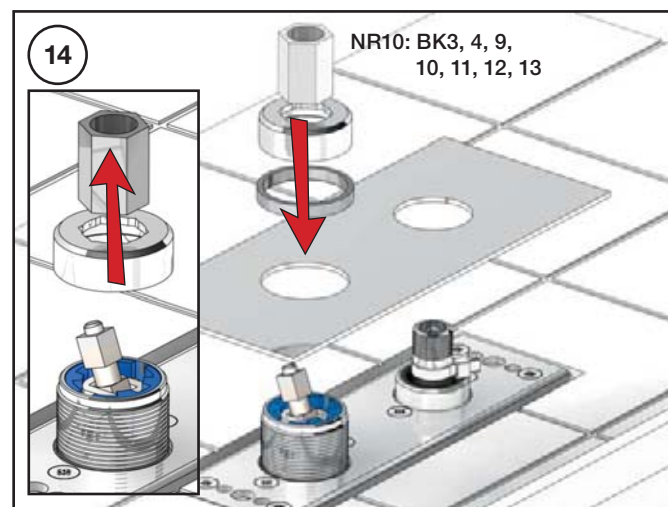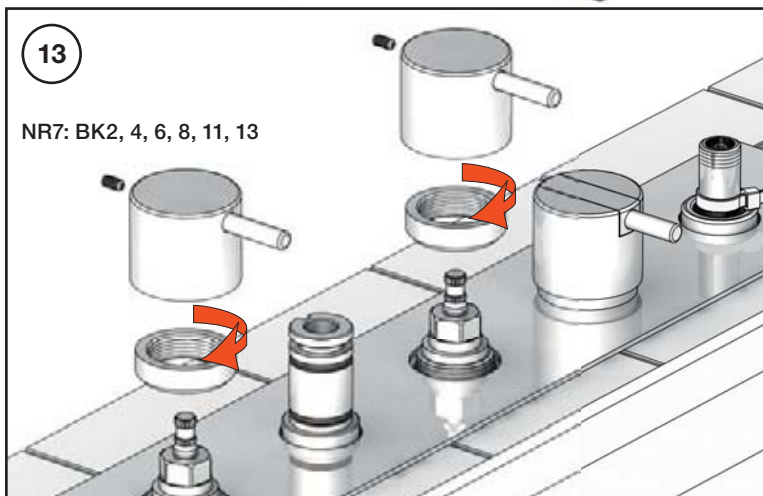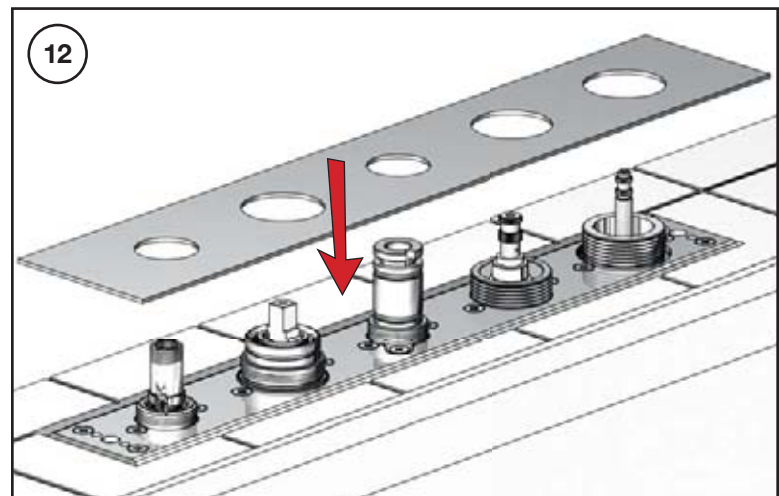

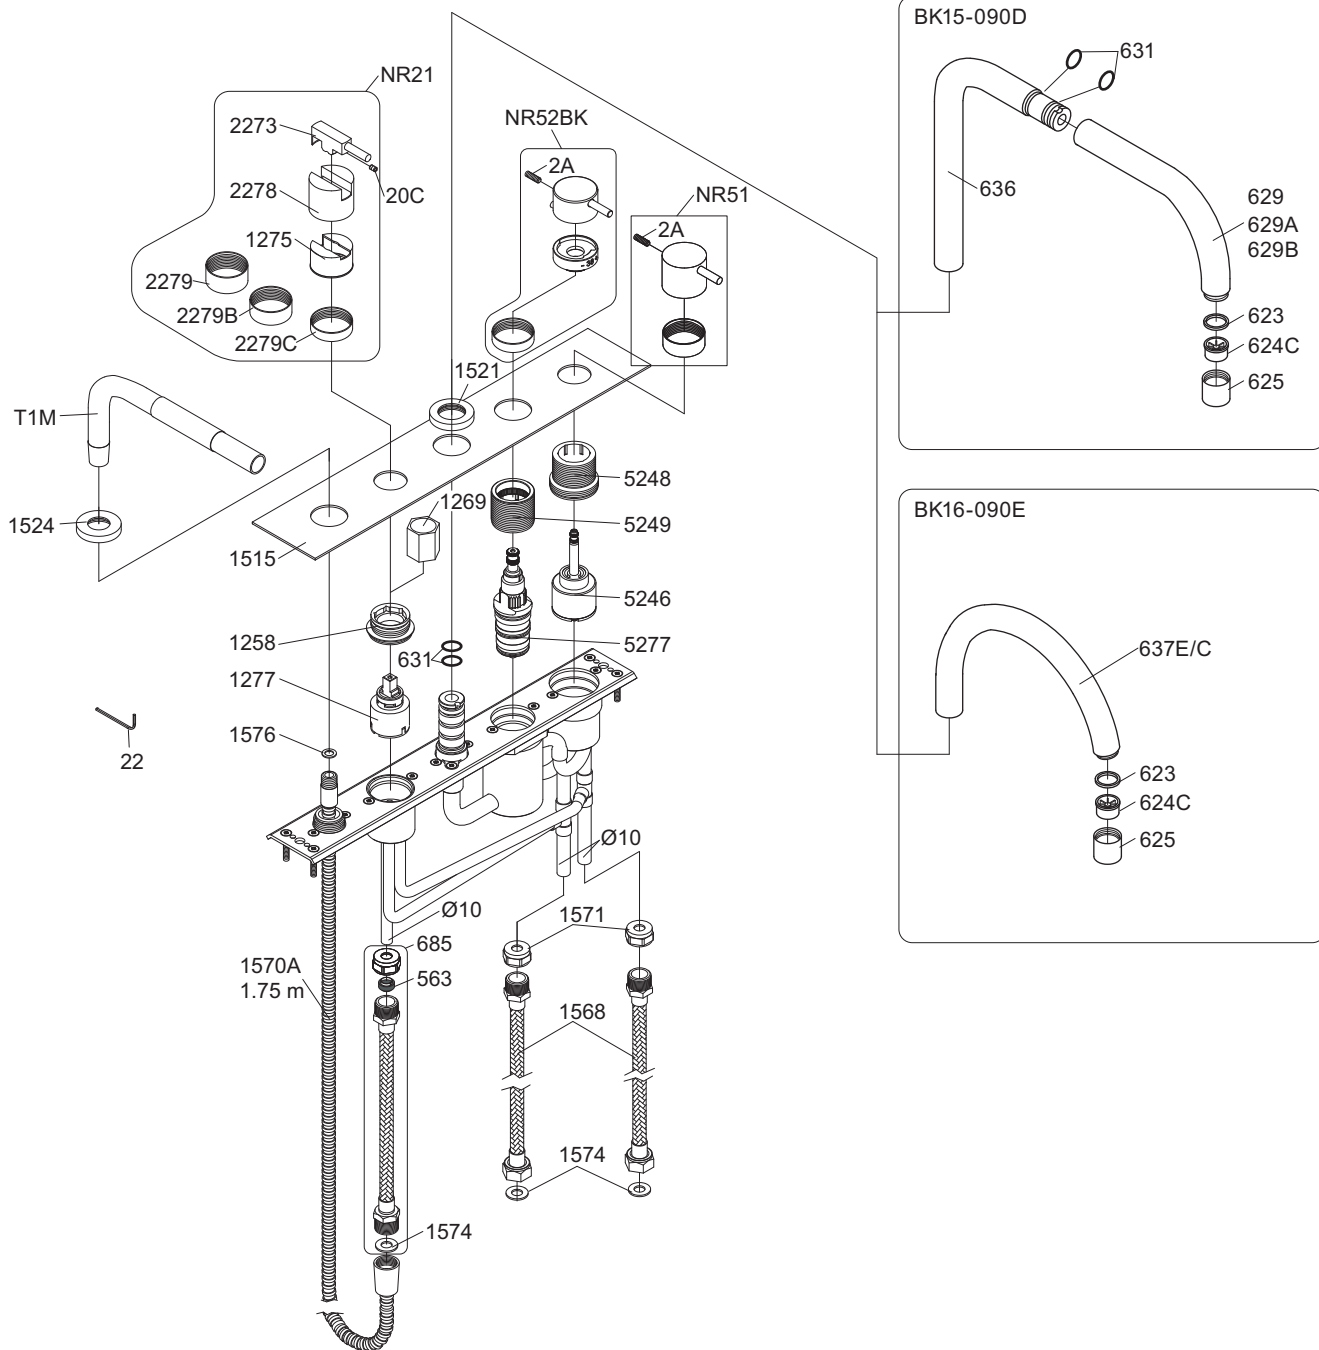

NR21: VR20C, VR22, VR1275, VR2269, VR2273, VR2278, VR2279+B+C
 NR51: VR2A, VR22, VR2279+B+C, VR5251
 NR52BK: VR2A, VR22, VR2279+B+C, VR3109, VR3111, VR5252, VR5253BK, VR5255, VR5256
 VR090D/C: VR623, VR624C, 4xVR631, VR1902



VOLA A/S
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA BK15, 16

Dato

Jan. 07

Rev.

0

Blad

SB 77.2