


VOLA 600, 700, 700V, 900, 1500
VOLA 800, 800V, 800N, 800NV, 800T, 800TV
VOLA S20V, S40V


Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsvægledning
Montage hanleiding
Manuel de montage

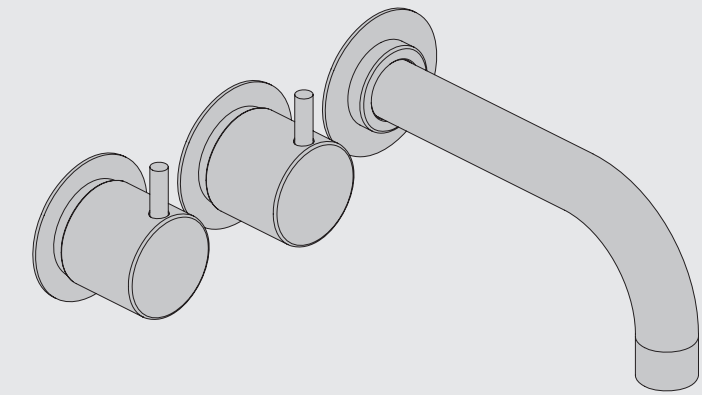


	L	L1	L2	L3	H	H1	H2	H3
A	295 mm 11 1/2"	160 mm 6 1/2"	145 mm 5 3/4"	-	95 mm 3 3/4"	-	-	-
B	395 mm 15 1/2"	260 mm 10"	156 mm 6 1/8"	78 mm 3 1/16"		103 mm 4"	-	-
C	490 mm 19 1/2"	355 mm 14"	166 mm 6 1/2"				-	-
D	570 mm 23"	435 mm 17"					122 mm 4 3/4"	113 mm 4 1/2"


A: S20V

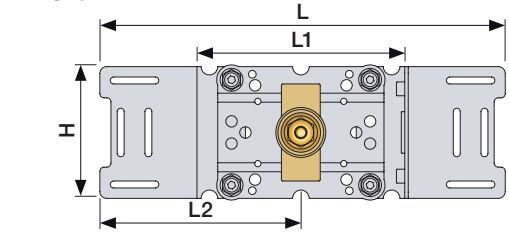




B: 900, S40V

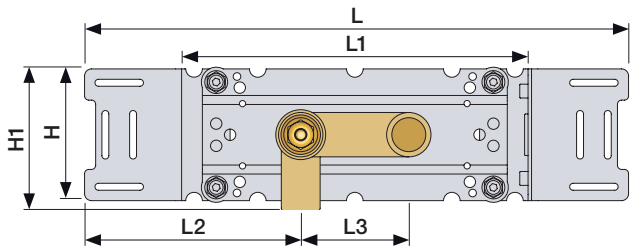

C: 600, 700V, 800V, 1500

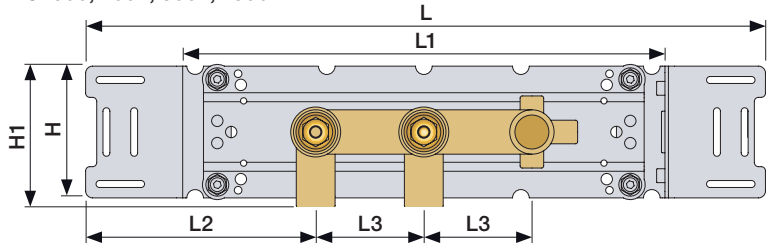

D: 800NV, 800TV

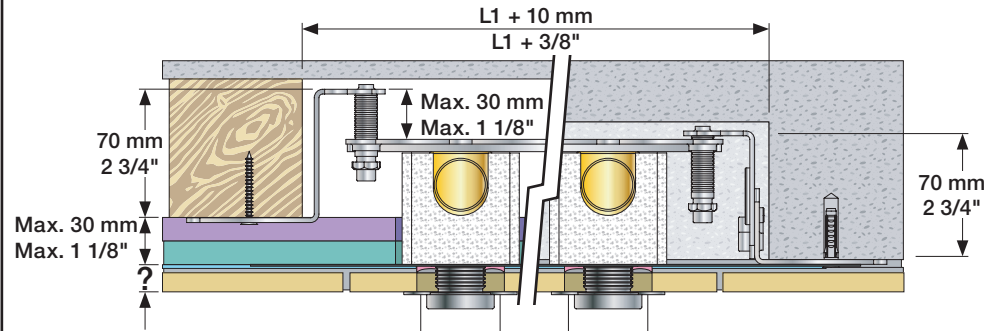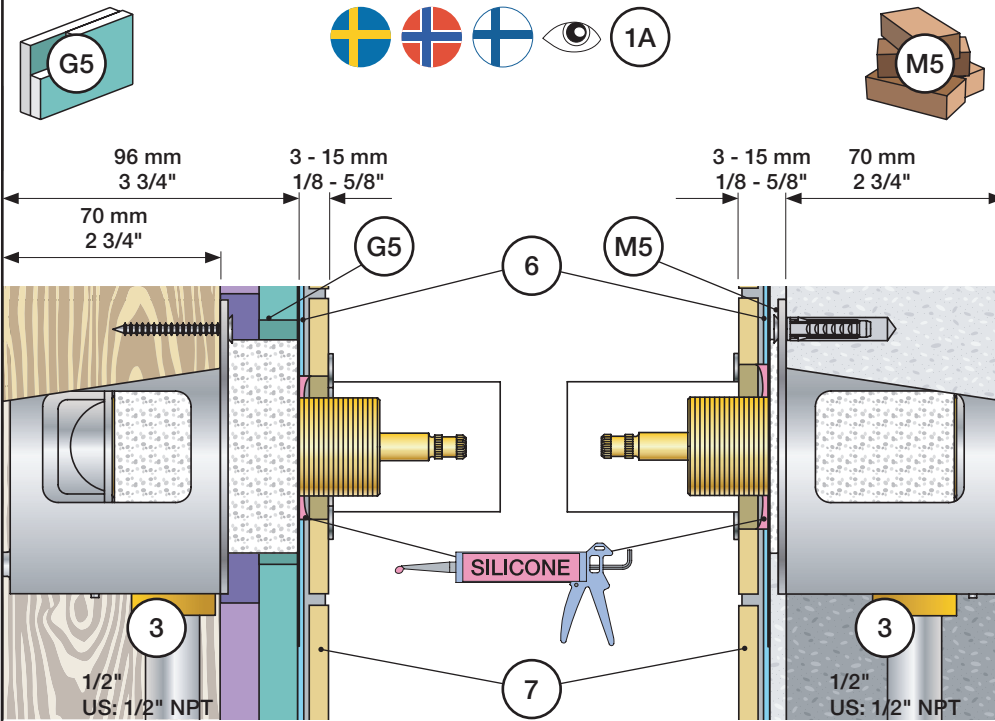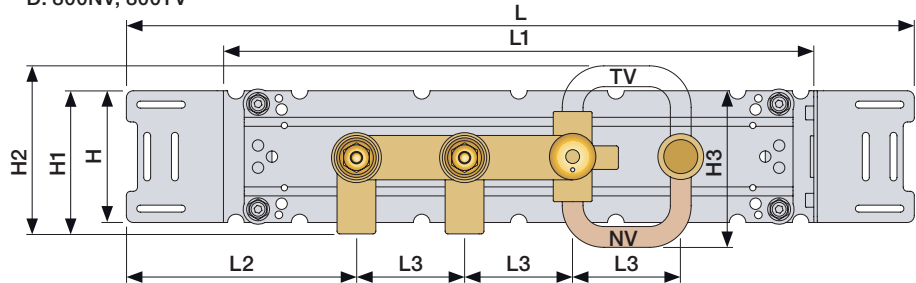

Data, 3 Bar/43.5 Psi:

Max:	l/min.	Gal/min.
600:	65	17.2
700V:	65	17.2
800V:	34	9.0
900:	30	8.0
1500:	65	17.2

Max. 65°C, 150°F

Max.: 10 Bar/145 psi

Extension
Verlängerung



Forlængerdele
Förlängning


600, 700V, 800V: 2xVR697
1500: 1xVR697+1xVR698
900: 1xVR697

Verlengstukken
Modification


600/700/800/1500	VR697	VR1400	VR2019
Tiles:	3 - 15 mm	Std.	Std.
Fliesen:	15 - 25 mm	+10	+10
Fliser:	25 - 35 mm	+20	+20
Tegels:	35 - 45 mm	+30	+30
Carreaux:	45 - 55 mm	+40	+40
	55 - 65 mm	+50	+50

Extension, retrofit
Verlängerung, nachträglicher Einbau
Forlængerdele, eftermontering
Förlängning, eftermontering
Aanpassing na montage
Modification après installation


52 - 0 mm



-15 - 0 mm




Fitting of extension
Montage von verlängerung

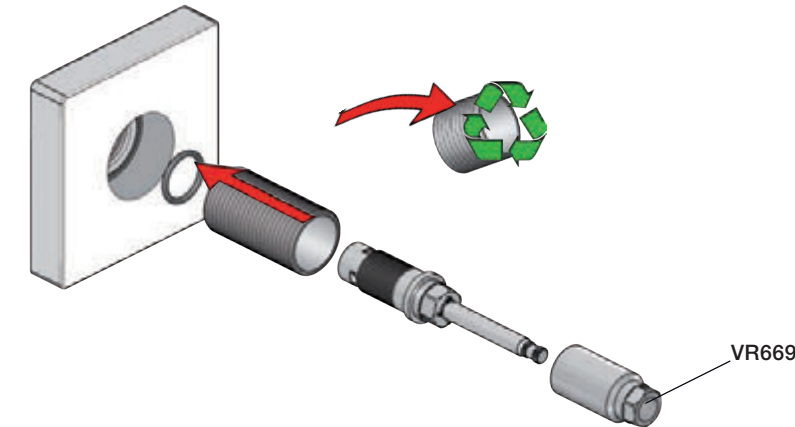


Montering af forlængerdele
Montering av förlängning

Montage van de verlengstukken
Montage des rallonges

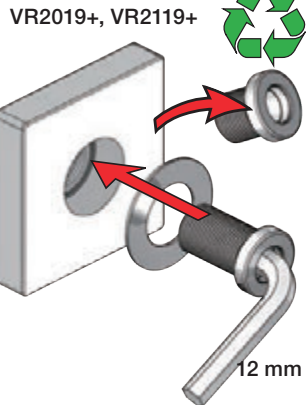

VR1400+

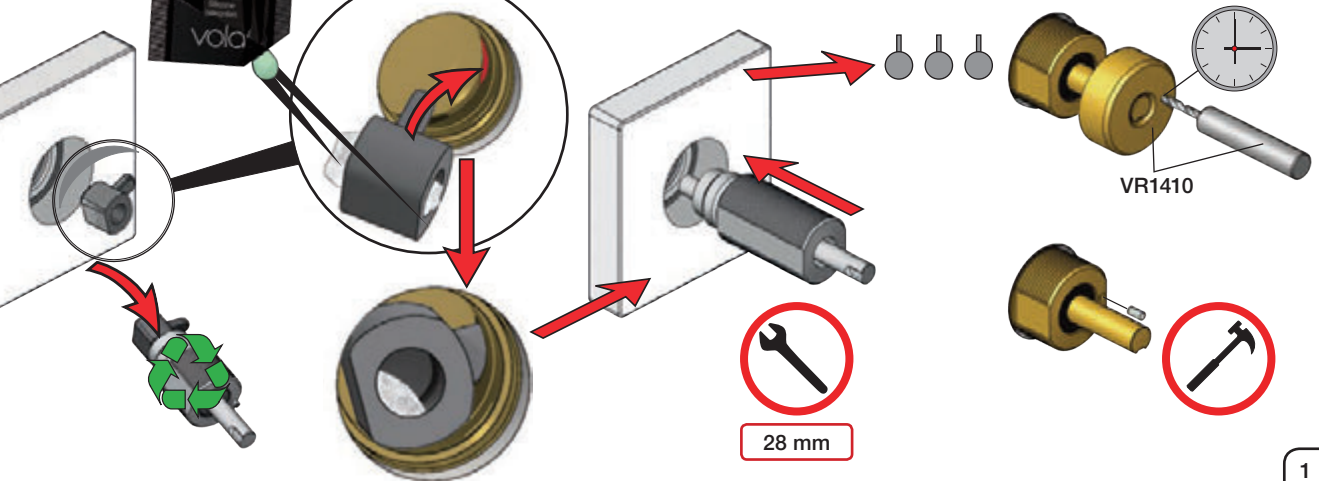

1

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

M5

G5

1A

Box till inbygggnadsblandare.
Boks til indbygningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen
köps separat.
Ikke inkludert, kjøpes
separat.
Eivät sisälly tilaukseen,
ostettava erikseen.

200M

PEX1

2

Max. 26 mm
Max. 1"

3

Sverige: ENDAST PEX.
Se separat vägledning för PEX

VOLA PEX1
15 mm pex

Cu

4

Flush installation
Installation Spülen
Skyl installation

Skölj installation
Kraan doorspoelen
Rincer l'installation

M5

6

G5

6

1x18 mm

2x13 mm

5 mm - 3/16"

PEX

2x13 mm

6

Waterproof membrane
Wasserdichte Membran

Vandtæt membran
Vattentät membran

Waterdicht membran
Membrane imperable

7

Handle assembly
Montage vom Griffe

Montage af greb
Montering av grepp

Installatie van de grip
l'installation de poignées

NR 17 - 1

		A
VR279	16 mm	31 - 36 mm
VR279B	12 mm	27 - 32 mm
VR279C	8 mm	23 - 28 mm

NR 17 - 2

NR 19 - 1

NR 19 - 2

2

VOLA 010, 020, 030, 040, 040B
VOLA 010C, 020C, 040D

Fitting instruction
 Montageanleitung
 Monteringsvejledning
 Monteringsvægledning
 Montage hanleiding
 Manuel de montage



010, 020

010C, 020C

030

040, 040B

040D

www.vola.com

mnt_010_V1_40998982



Standard Flow data:		Max.
010/020	(l/min)	5.0
	(Gal/min)	1.3
010C/020C	(l/min)	30
	(Gal/min)	7.9
030	(l/min)	9.0
	(Gal/min)	2.0
040/040B	(l/min)	25
	(Gal/min)	6.6
040D	(l/min)	30
	(Gal/min)	7.9
		Max. 65°C. Max. 150°F



VR161:

VR161K: 7 l/min - 1.8 Gal/min

VR161D: 9 l/min - 2.5 Gal/min

VR161F: 14 l/min - 3.7 Gal/min




VR161K



VR161D



VR161F



For more water saving possibilities please see:

Weitere Wassersparmöglichkeiten finden Sie auf:

For flere vandbesparende muligheder se venligst:


För mer vattenbesparande möjligheter hänvisas till:

Voor meer waterbesparende mogelijkheden zie:


Pour plus d'informations sur les options : économie d'eau, voir le site:




www.vola.com



010, 020

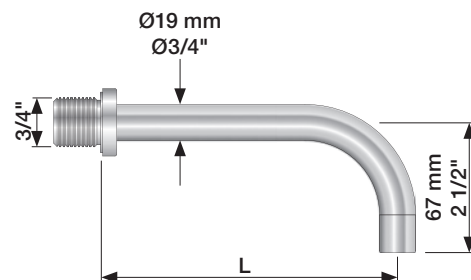


010C, 020C

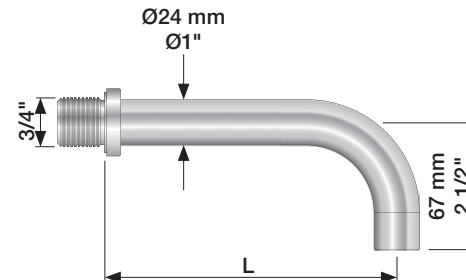


	L (mm)	L (Inch)
010(C)/100	100	4"
010(C)/130	130	5"
010(C)/160	160	6"
020(C)/200	200	7 3/4"
020(C)/225	225	8 3/4"
020(C)/260	260	10 1/4"
020(C)/300	300	11 3/4"

030

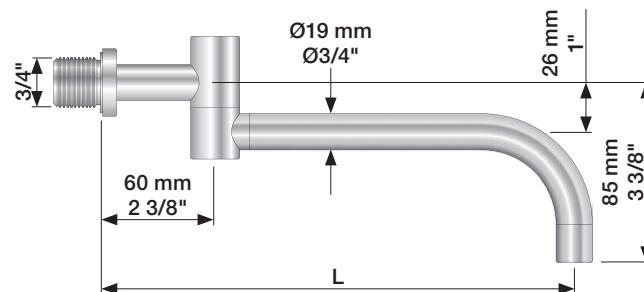


	L (mm)	L (Inch)
030/200	200	7 3/4"
030/250	250	9 3/4"
030/300	300	11 3/4"
030/350	350	13 3/4"

040, 040B

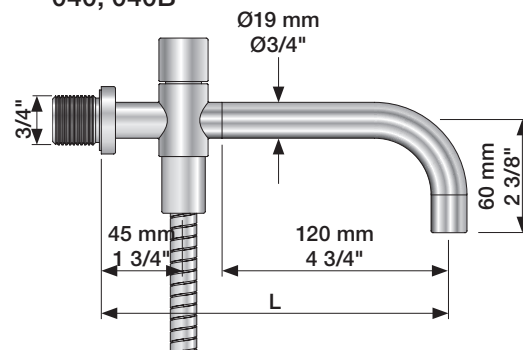

040D

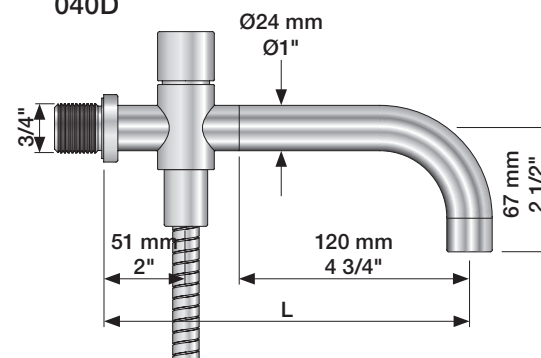


	L (mm)	L (Inch)
040	185	7 3/4"
040B	235	9 3/4"
040D	200	7 3/4"
040D/250	250	9 3/4"
040D/300	300	11 3/4"

1

010, 020, 030, 040, 040B


VR2019

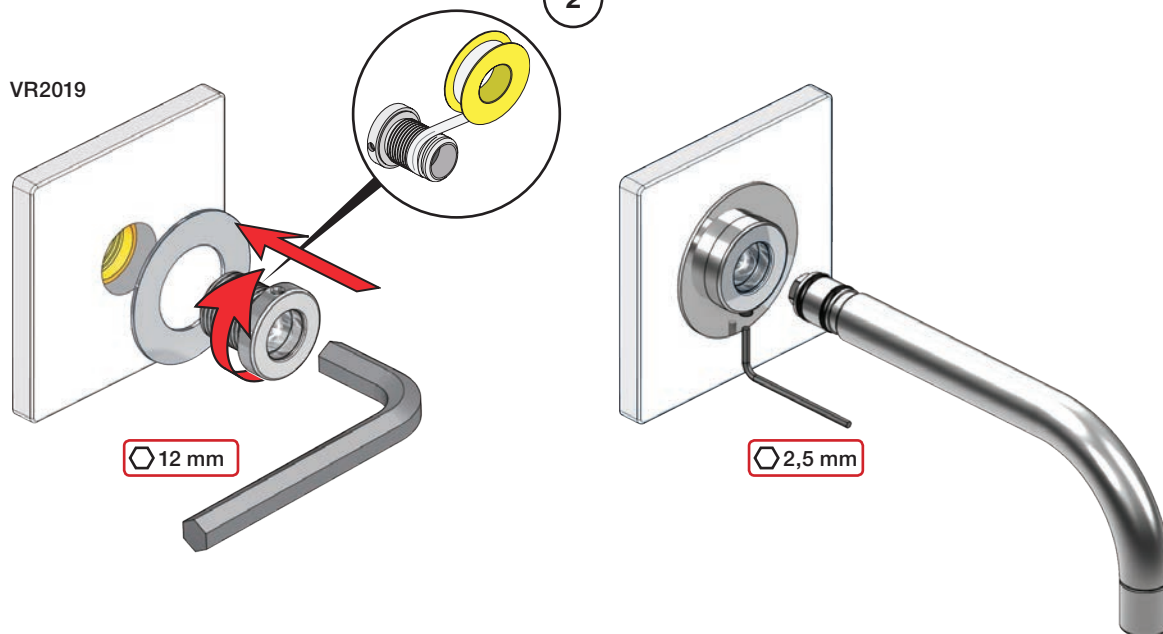


3

010C, 020C, 040D

VR2119

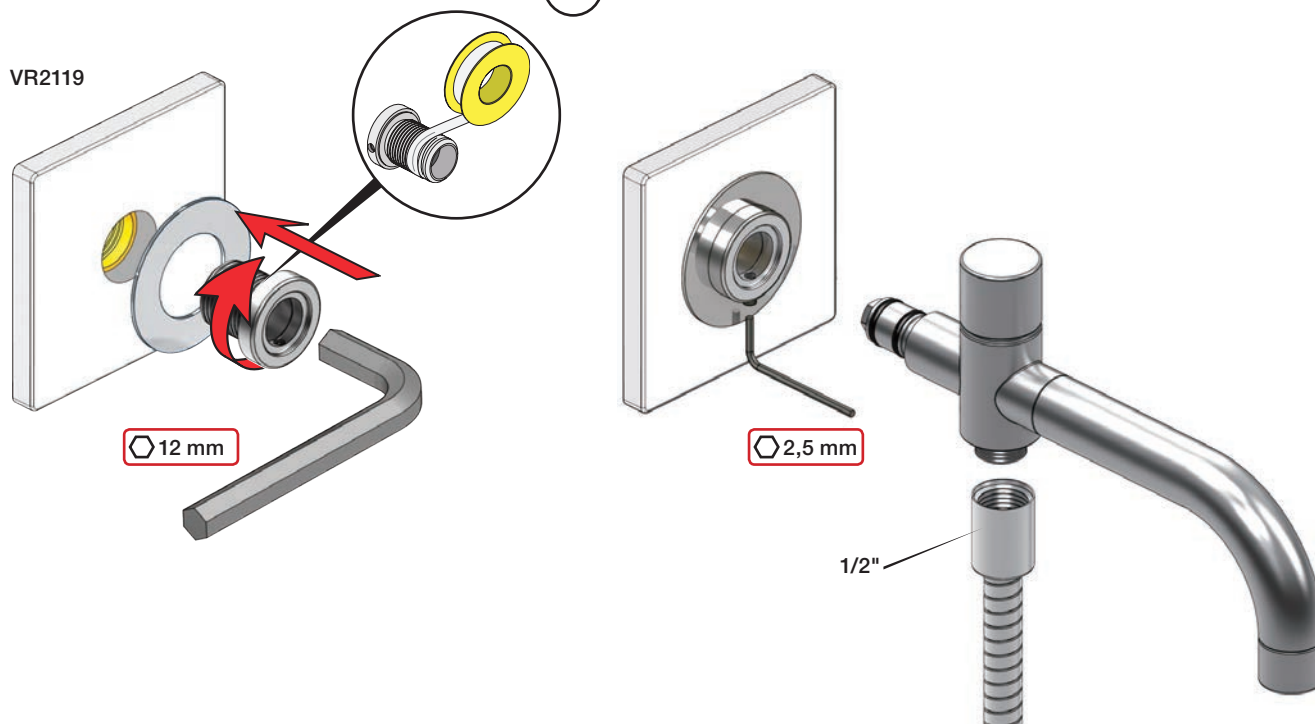



4

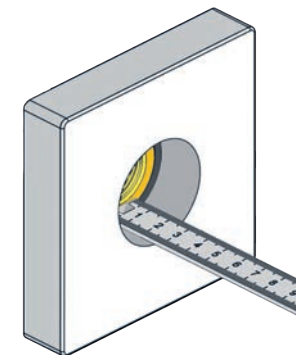Extension
VerlängerungForlængerdele
FörlängningVerlængstukken
Modification

		VR2019: 	VR2119: 
Tiles: Fliesen: Fliser: Tegels: Carreaux:	3 - 15 mm	Standard	Standard
	15 - 25 mm	VR2019+10	VR2119+10
	25 - 35 mm	VR2019+20	VR2119+20
	35 - 45 mm	VR2019+30	VR2119+30
	45 - 55 mm	VR2019+40	VR2119+40
	55 - 65 mm	VR2019+50	VR2119+50

VR2019+/VR2119+

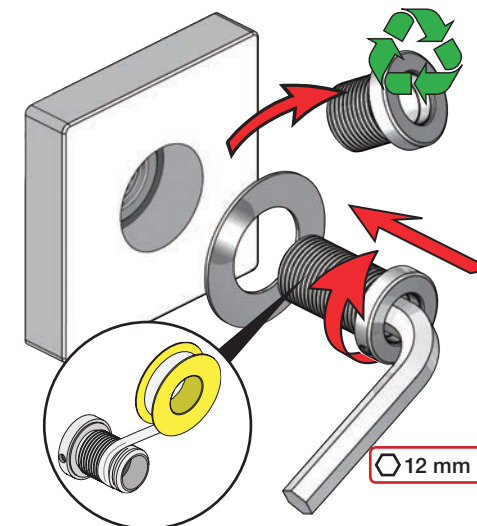

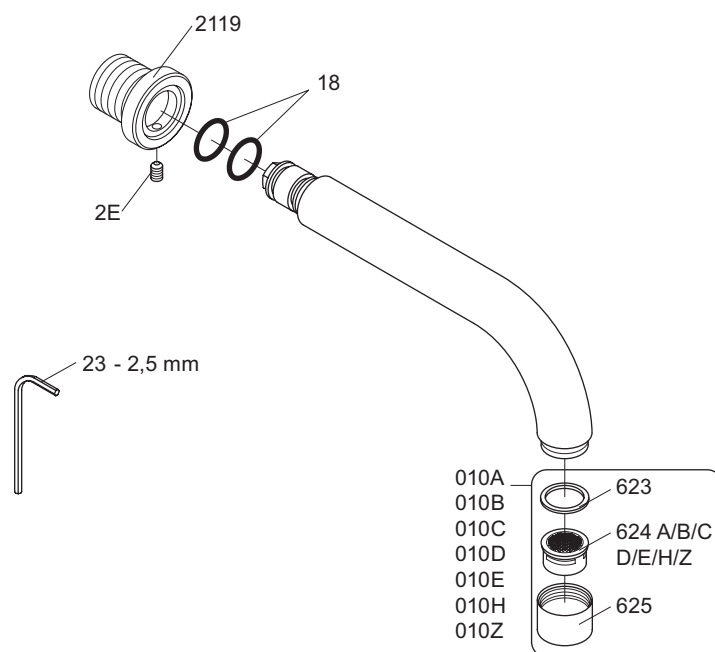

VR010A: VR623, VR624A
 VR010B: VR623, VR624B
 VR010C: VR623, VR624C
 VR010D: VR623, VR624D
 VR010E: VR623, VR624E
 VR010H: VR623, VR624H
 VR010Z: VR623, VR624Z



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com


VOLA 010C/020C

Date
 Oct. 16

Rev.
 1


Sheet
SB 11.1

600

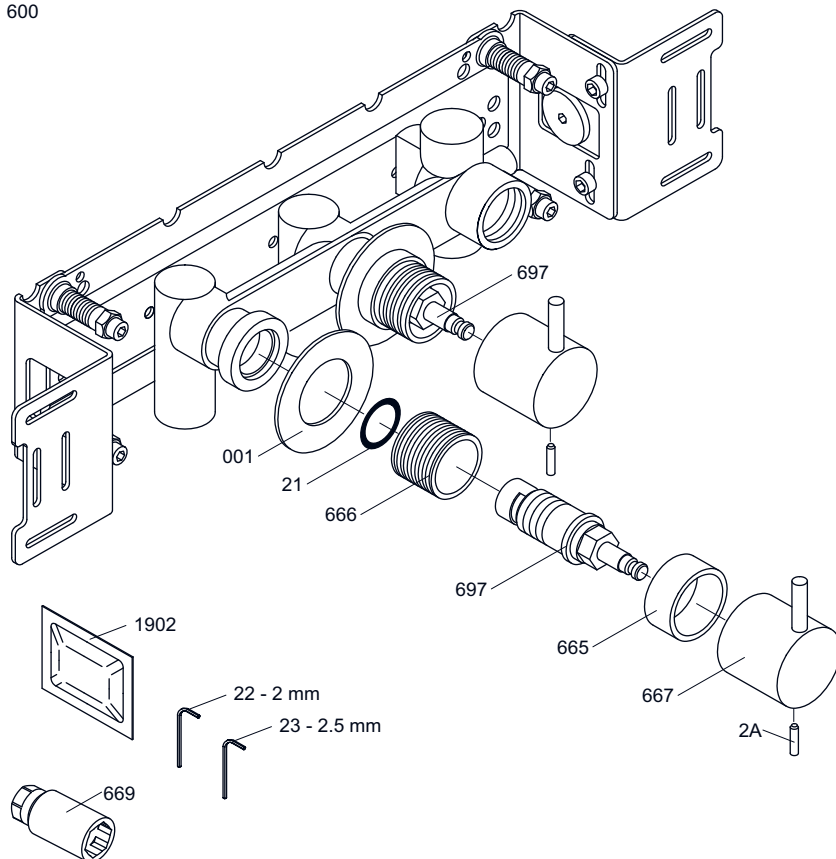


NR17: VR2A, VR23, VR665, VR667
 VR697K: VR21, VR23, VR666, VR669, VR697


900

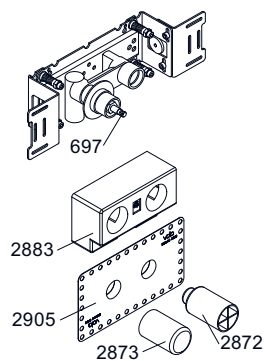


700V

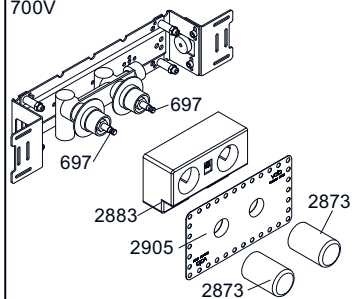

600

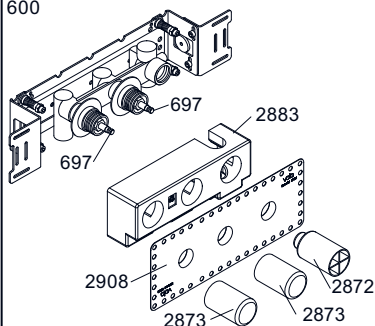

1500



002




003K



001



001



VOLA A/S
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA 600
 700V, 900, 1500

Dato

Feb. 10

Rev.

1

Blad

SB 5.3