


VOLA 5400, 5400V
VOLA 5400N, 5400NV, 5400F, 5400FV
VOLA 5400T, 5400TV, 5400R, 5400RV
VOLA 5600, 5600V

Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsv gledning
Montage hanleiding
Manuel de montage

2 Way Diverter
2-Wege-Umstellung
2-vejs omskifter

2-v gs omkastare
2-wegomstel
Inverseur   2 voies

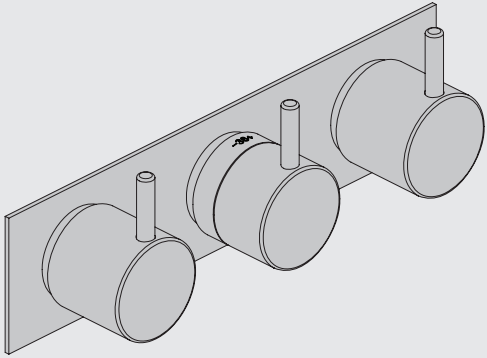







www.vola.com
mnt_5400A2_V_40999002



mm/Inch	L	L1	L2	L3	L4	L5	L6	H	H1	H2	H3
A	395 15 1/2"	260 10"	204 8"	-			-		-		-
B	490 19 1/2"	355 14"			78 3 1/16"	60 2 3/8"	-	95 3 3/4"		130 5 1/8"	-
C	570 23"	435 17"	133 5 1/4"	64 2 1/2"			78 3 1/16"	127 5"			54 2 1/8"
D	647 25 1/2"	512 20"					156 6 1/8"				

5400: 5400V + 3 x 200M
5400N: 5400NV + 2 x 200M
5400F: 5400FV + 2 x 200M
5600: 5600V + 3 x 200M

5400T: 5400TV + 2 x 200M
5400R: 5400RV + 2 x 200M

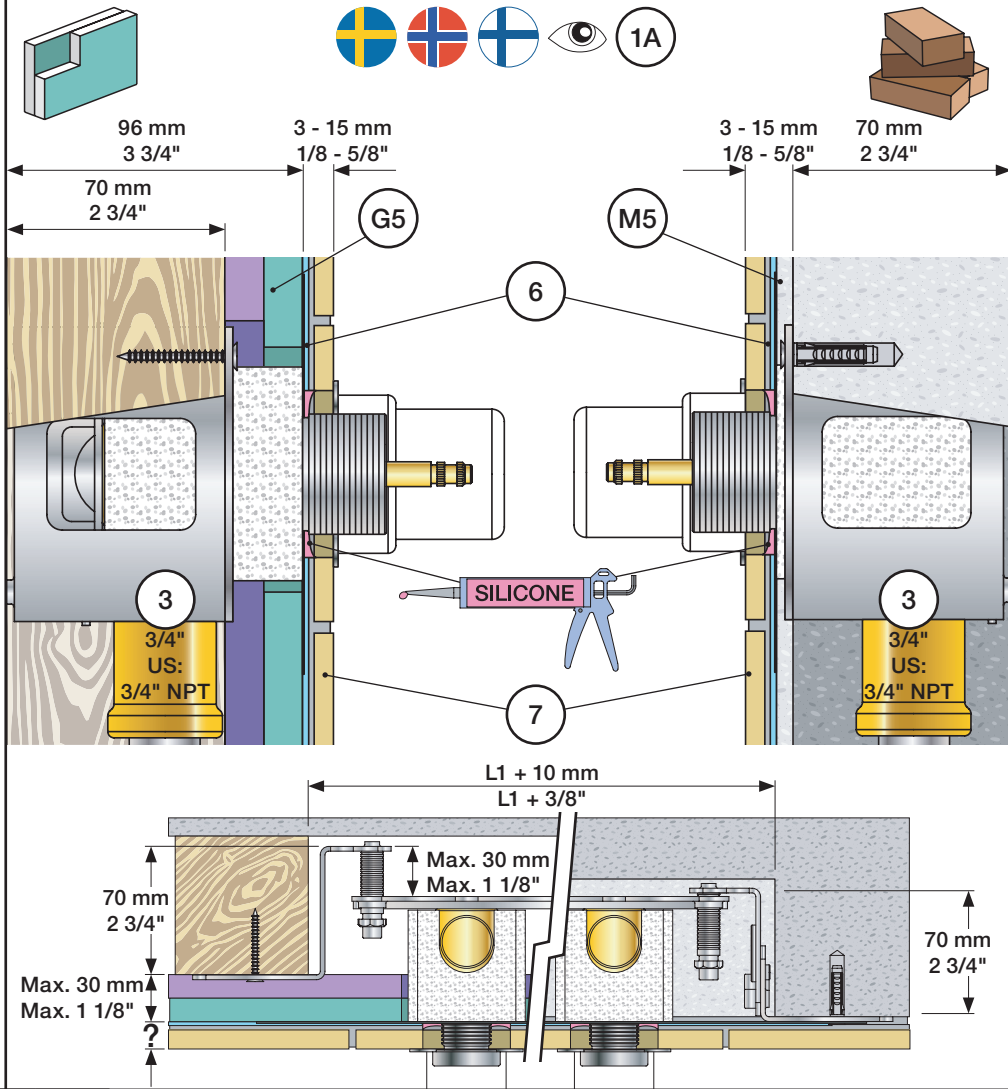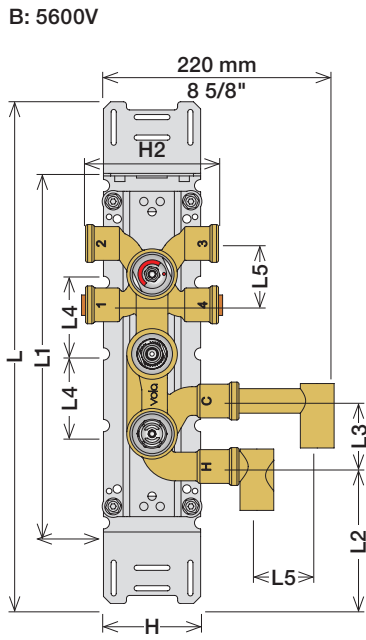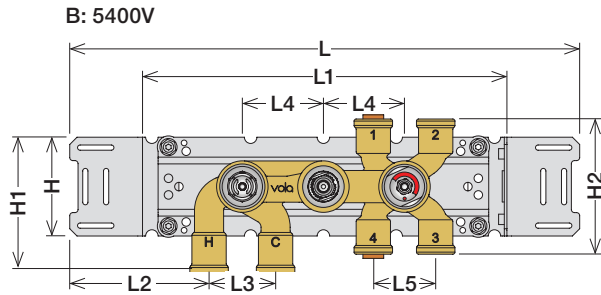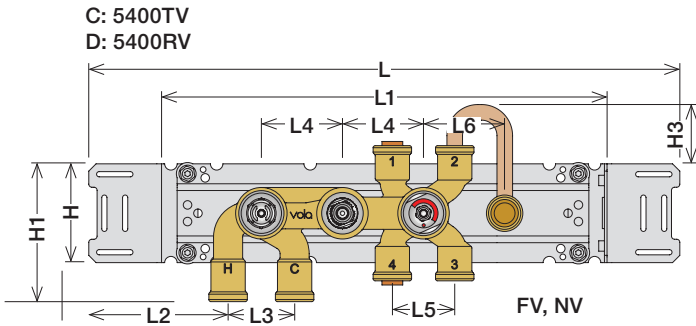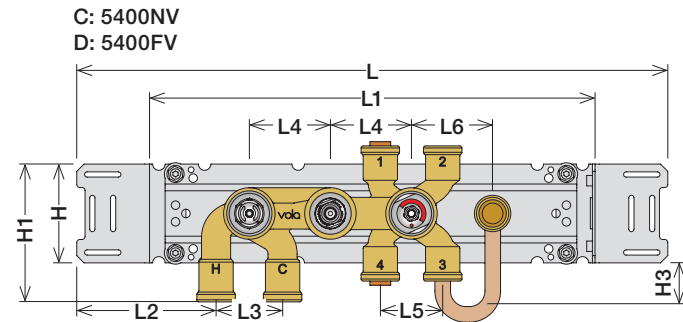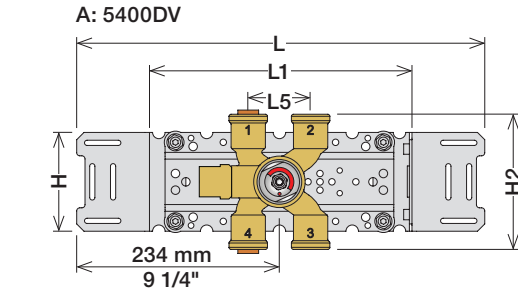

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

	1	M	2
Out 1	32/(8.5)	16/(4.2)	-
Out 2	-	32/(8.5)	-


Max.: 10 Bar/145 psi
Max. 65°C, 150°F

USA:
Minimum flow rate: 1.8 gpm.

Extension
Verl ngerung

Forl ngerdele
F rl ngning


Verl ngst kken
Modification

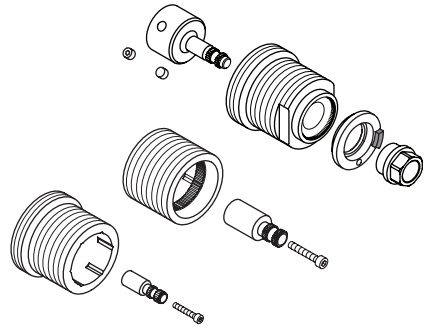


	VR5250	VR5410	VR2019
Tiles:	3 - 15 mm Std.	Std.	Std.
Fliesen:	15 - 25 mm +10	+10	+10
Fliser:	25 - 35 mm +20	+20	+20
Tegels:	35 - 45 mm +30	+30	+30
Carreaux:	45 - 55 mm +40	+40	+40
	55 - 65 mm +50	+50	+50

Fitting of extension
Montage von verl ngerung
VR5250

Montering af forl ngerdele
Montering av f rl ngning


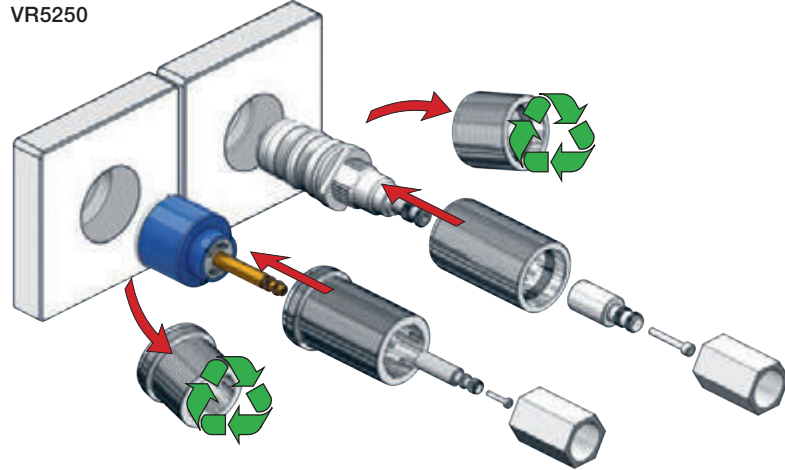


VR5410

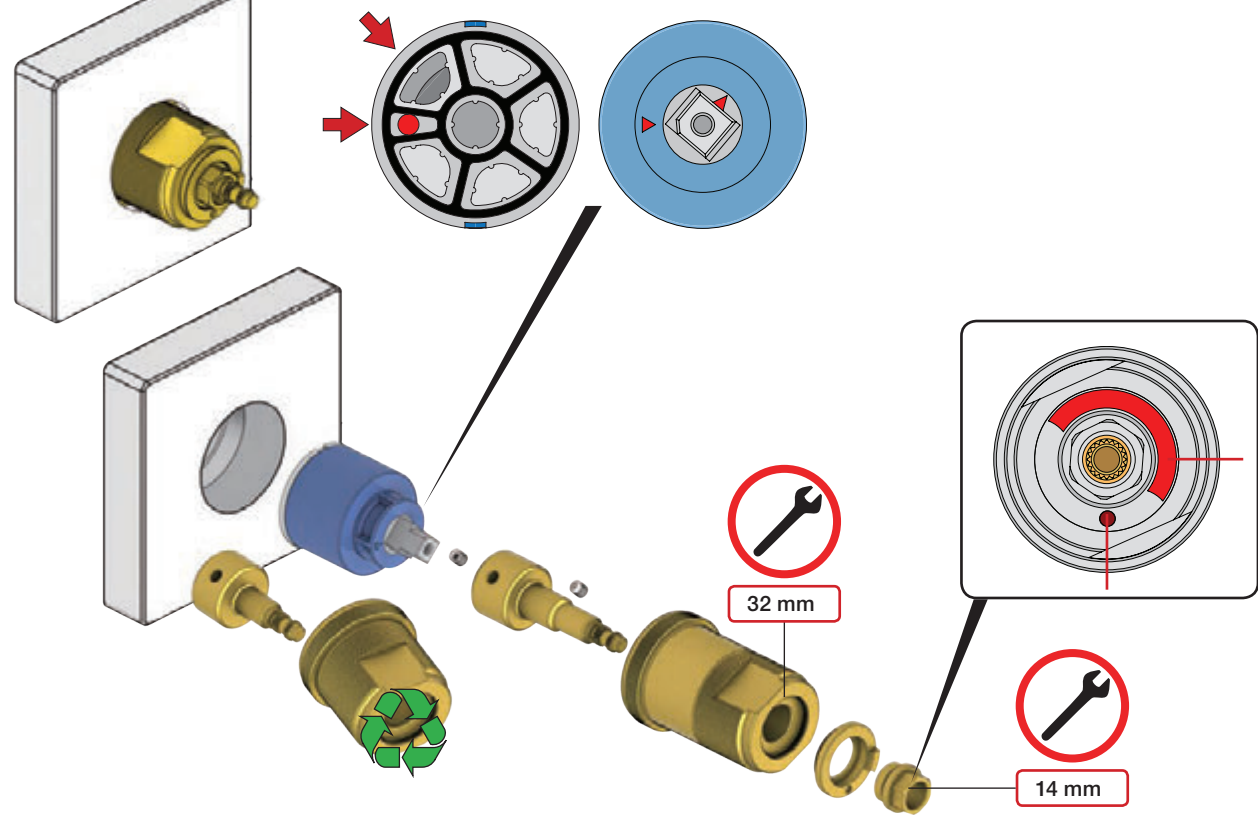


Extension, retrofit
Verl ngerung, nachtr glicher Einbau
Forl ngerdele, eftermontering

F rl ngning, eftermontering
Aanpassing na montage
Modification apr s installation




	VR5250	VR5410	VR2019
	37 - 49 mm Std.	Std.	Std.
	27 - 37 mm +10	+10	+10
	17 - 27 mm +20	+20	+20
	7 - 17 mm +30	+30	+30
	-3 - 7 mm +40	+40	+40
	-13 - -3 mm +50	+50	+50

Montage van de verl ngst kken
Montage des rallonges



VR2019+, VR2119+

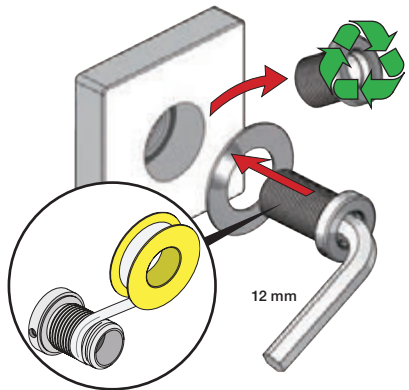

1

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

M5

G5

1A

Box till inbyggnadsblandare.
Boks til indbyggningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen
köps separat.
Ikke inkludert, kjøpes
separat.
Eivät sisälly tilaukseen,
ostettava erikseen.

200M

PEX1

2

3/4"

Max. 26 mm
Max. 1"

3/4"

Max. 26 mm
Max. 1"

3

BAR
PSI

3/4"
US: 3/4" NPT

Sverige: ENDAST PEX.
Se separat vägledning för PEX

VOLA PEX5

15 mm pex
18 mm pex

Cu

4

Flush installation
Installation Spülen
Skyl installation
Skölj installation
Kraan doorspoelen
Rincer l'installation

Pos.

A 1
B 2

5400

5600

2 click!

M5

6

G5

6

1x18 mm

2x13 mm

5 mm - 3/16"

PEX

2x13 mm

6

Waterproof membrane
Wasserdichte Membran
Vandtæt membran
Vattentät membran
Waterdicht membran
Membrane imperable

7

SILICONE

7

Ø52 mm
Ø2 1/16"

Ø42 mm
Ø1 5/8"

Ø52 mm
Ø2 1/16"

Ø42 mm
Ø1 5/8"

Handle assembly
Montage vom Griffe

Montage af greb
Montering av grepp

Installatie van de grip
l'installation de poignées

NR 51 - 1

VR2279C

VR2279B

VR2279

A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 51 - 2

2.5 mm

NR 52 - 1

VR5277LK

VR5278

VR5269

38°C
100°F

NR 52 - 2

VR2279C

VR2279B

VR2279

A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 52 - 3

Anti scald settings
Verbrûschutz
Skoldningssikring
Skållnings skydd
Broeien verzekeringen
Prévention des brûlures

38°C
100°F

2.5 mm

NR 52 - 4

2.5 mm

NR 64 - 1

VR2279C

VR2279




A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm



NR 64 - 2

2.5 mm

5400V

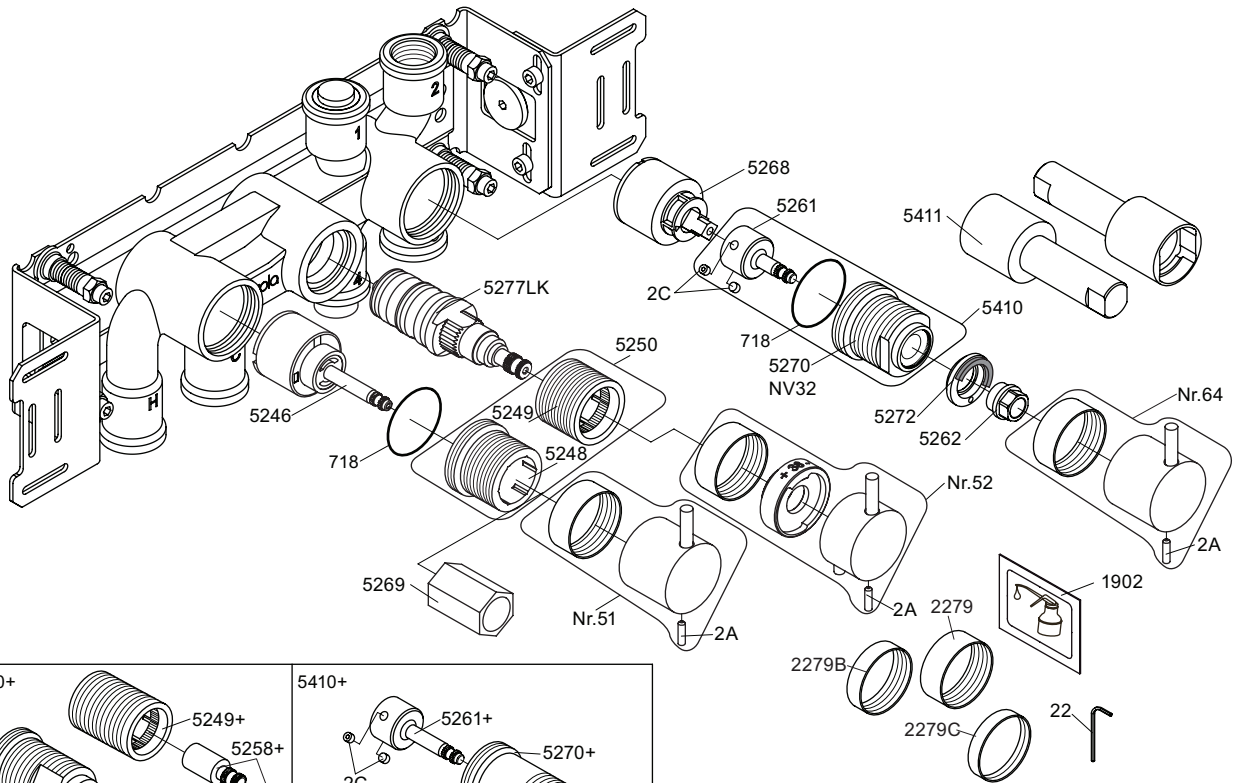



NR51: VR5251, VR2279+B+C, VR2A
 NR52: VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
 NR64: VR5251, VR2279+B+C, VR2A
 VR5250+: VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
 VR5257+: VR5257+, VR5259+
 VR5258+: VR5258+, VR5260+
 VR5410+: 2xVR2C, VR5261+, VR5270+

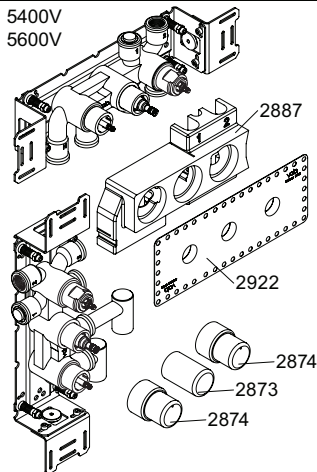

5003B





3x2001

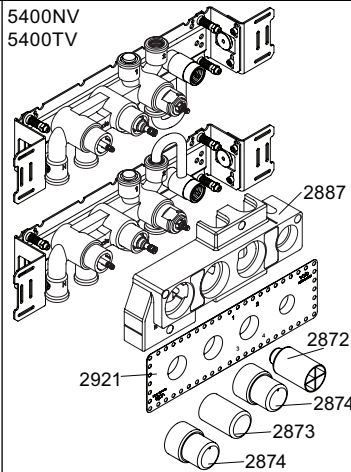

5004B




3x2001, 001

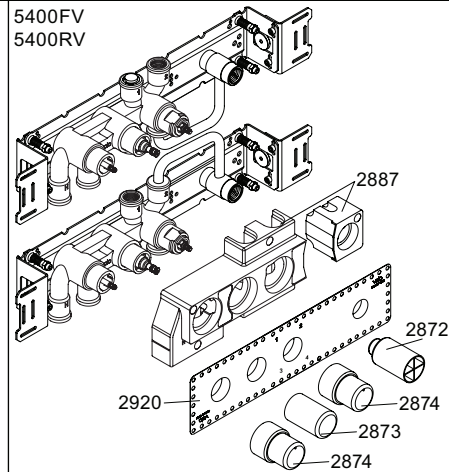

5004L



3x2001, 001

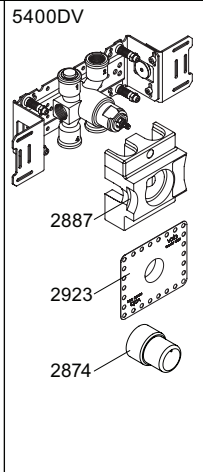

2001



2001



vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA 5400V
 5400FV, 5400NV
 5400RV, 5400TV
 5600V

Date
 Jan. 18

Rev.
 4

Sheet
SB 10.54