


VOLA 5400, 5400V
VOLA 5400N, 5400NV, 5400F, 5400FV
VOLA 5400T, 5400TV, 5400R, 5400RV
VOLA 5600, 5600V

Fitting instruction
Montageanleitung
Monteringsvejledning

Monteringsv gledning
Montage hanleiding
Manuel de montage

2 Way Diverter
2-Wege-Umstellung
2-vejs omskifter

2-v gs omkastare
2-wegomstel
Inverseur   2 voies

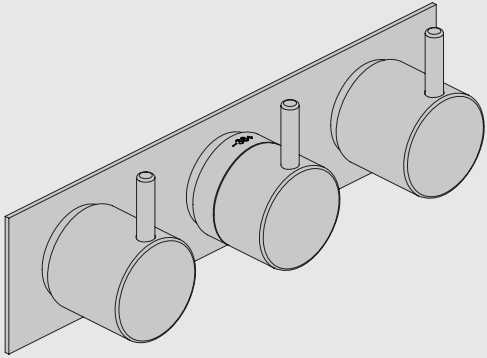






www.vola.com
mnt_5400A2_V_40999002



mm/Inch	L	L1	L2	L3	L4	L5	L6	H	H1	H2	H3
A	395 15 1/2"	260 10"	204 8"	-			-		-		-
B	490 19 1/2"	355 14"			78 3 1/16"	60 2 3/8"	-	95 3 3/4"	127 5"	130 5 1/8"	-
C	570 23"	435 17"	133 5 1/4"	64 2 1/2"			78 3 1/16"				54 2 1/8"
D	647 25 1/2"	512 20"					156 6 1/8"				

5400: 5400V + 3 x 200M
5400N: 5400NV + 2 x 200M
5400F: 5400FV + 2 x 200M
5600: 5600V + 3 x 200M

5400T: 5400TV + 2 x 200M
5400R: 5400RV + 2 x 200M

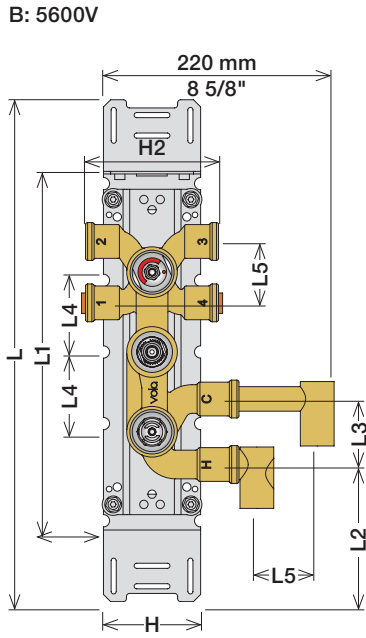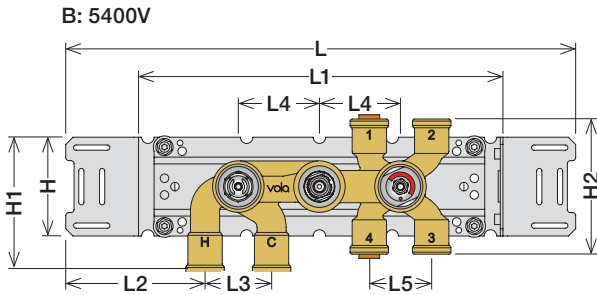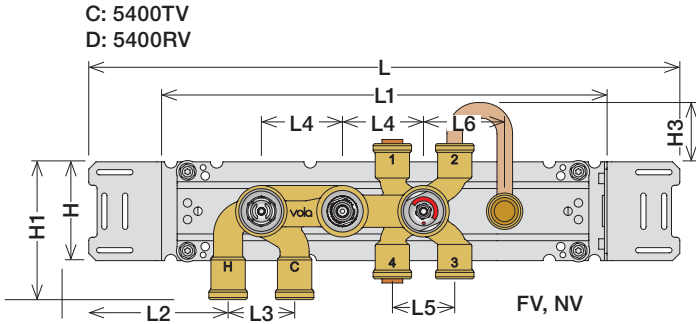
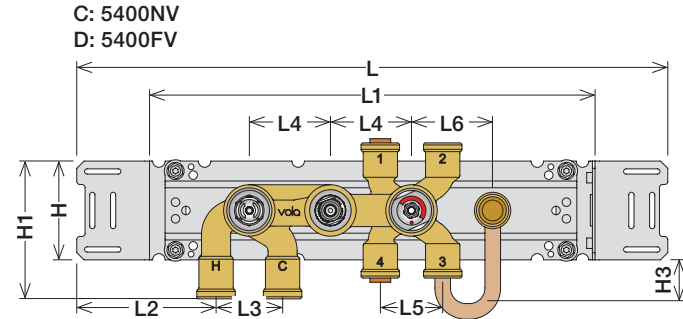
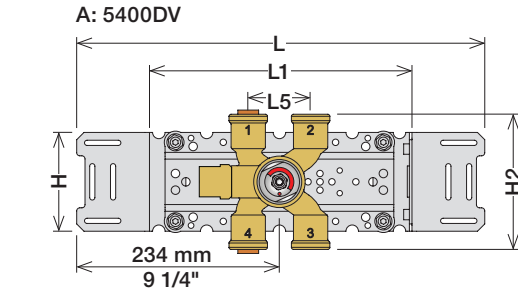


Data, l/min. / (Gpm) 3 Bar/43.5 Psi:

	1	M	2
Out 1	32/(8.5)	16/(4.2)	-
Out 2	-	32/(8.5)	-


Max.: 10 Bar/145 psi
Max. 65 C, 150 F

USA:
Minimum flow rate: 1.8 gpm.

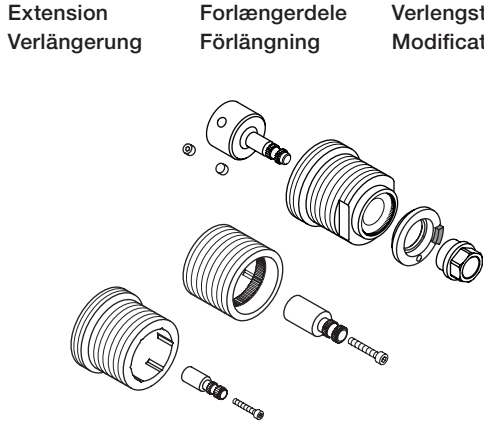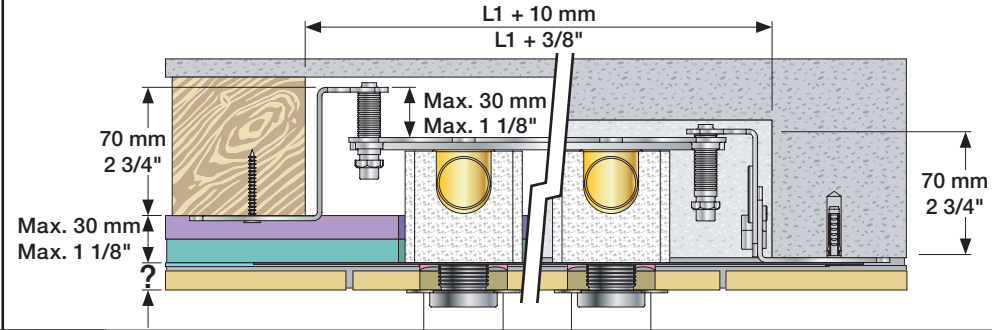
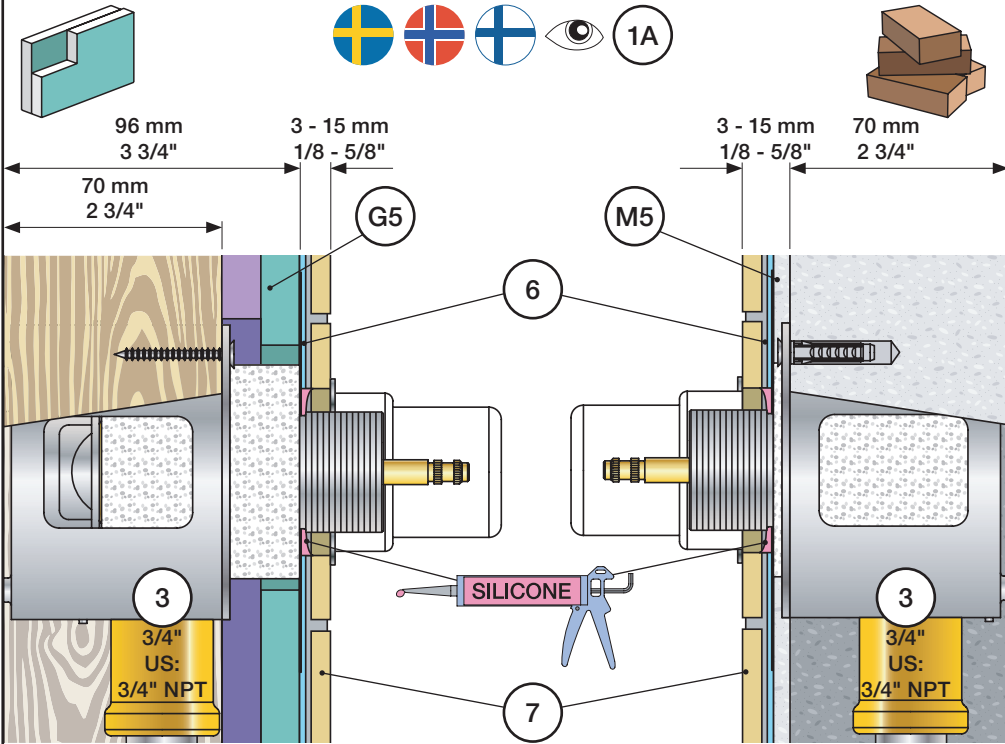


	VR5250	VR5410	VR2019
Tiles:	3 - 15 mm Std.	Std.	Std.
Fliesen:	15 - 25 mm +10	+10	+10
Fliser:	25 - 35 mm +20	+20	+20
Tegels:	35 - 45 mm +30	+30	+30
Carreaux:	45 - 55 mm +40	+40	+40
	55 - 65 mm +50	+50	+50

Fitting of extension
Montage von verl ngerung
VR5250

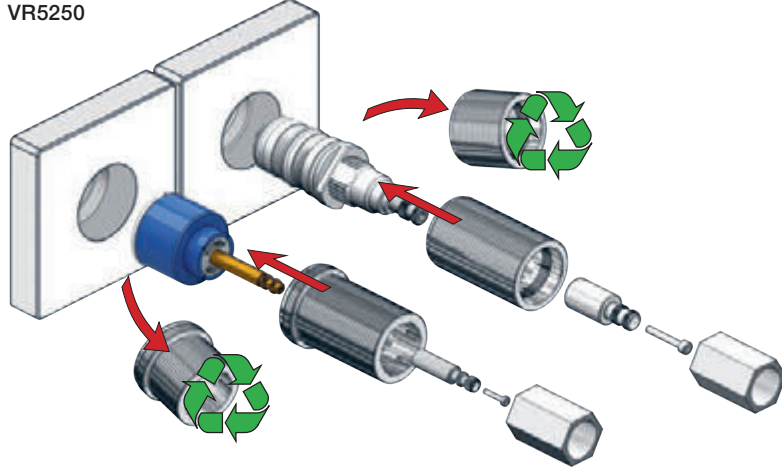


VR5410

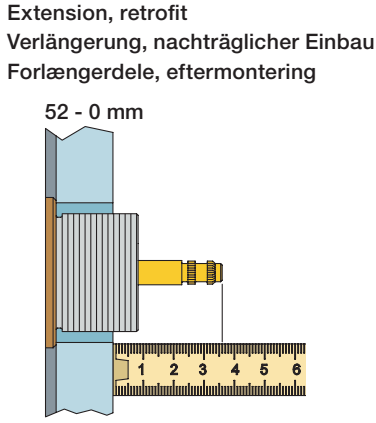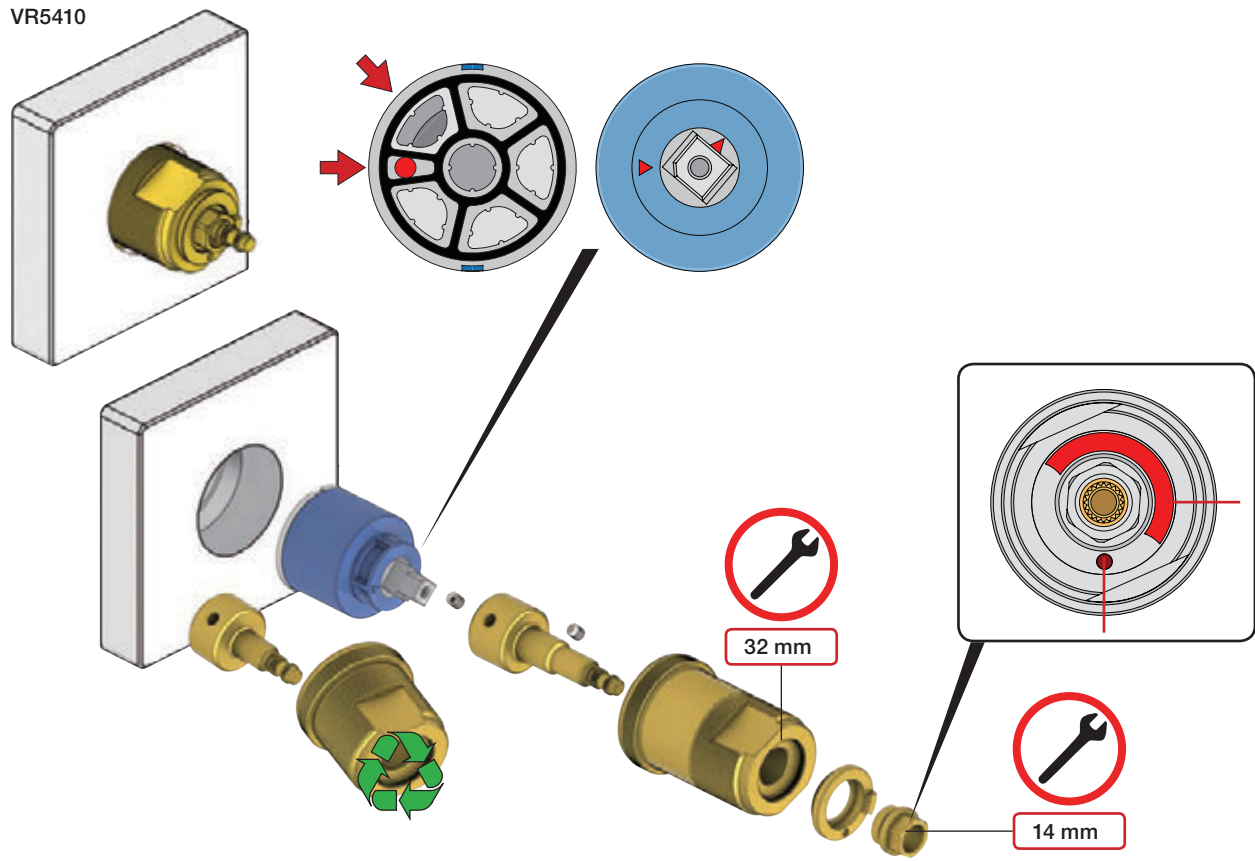

	VR5250	VR5410	VR2019
37 - 49 mm Std.	Std.	Std.	Std.
27 - 37 mm +10	+10	+10	+10
17 - 27 mm +20	+20	+20	+20
7 - 17 mm +30	+30	+30	+30
-3 - 7 mm +40	+40	+40	+40
-13 - -3 mm +50	+50	+50	+50

Montage van de verlengstukken
Montage des rallonges

VR2019+, VR2119+

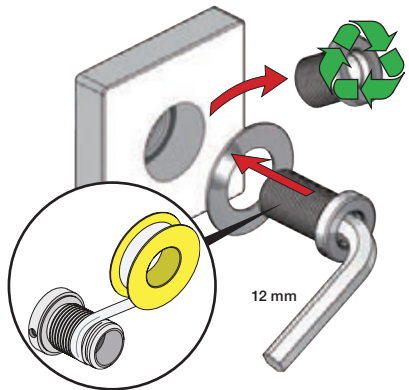

1

Check the local legislation.
Bitte die örtlichen Vorschriften überprüfen.
Tjek de lokale regler.
Kontrollera lokala föreskrifter
Nazitten lokale regelgeving.
Vérifiez la législation locale.

M5

G5

1A

Box till inbyggnadsblandare.
Boks til indbyggningsblander.
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen
köps separat.
Ikke inkludert, kjøpes
separat.
Eivät sisälly tilaukseen,
ostettava erikseen.

200M

PEX1

2

3/4"

Max. 26 mm
Max. 1"

3/4"

Max. 26 mm
Max. 1"

3

BAR
PSI

3/4"
US: 3/4" NPT

Sverige: ENDAST PEX.
Se separat vägledning för PEX

VOLA PEX5

15 mm pex
18 mm pex

Cu

4

Flush installation
Installation Spülen

Skyl installation
Skölj installation

Kraan doorspoelen
Rincer l'installation

Pos.

A 1

B 2

5400

5600

2 click!

5400

5600

2 click!

M5

6

G5

6

G5

6

1x18 mm

2x13 mm

5 mm - 3/16"

PEX

2x13 mm

6

Waterproof membrane
Wasserdichte Membran

Vandtæt membran
Vattentät membran

Waterdicht membran
Membrane imperable

Waterproof membrane
Wasserdichte Membran

Vandtæt membran
Vattentät membran

Waterdicht membran
Membrane imperable

7

Ø52 mm
Ø2 1/16"

Ø42 mm
Ø1 5/8"

Ø52 mm
Ø2 1/16"

Ø42 mm
Ø1 5/8"

SILICONE

Handle assembly
Montage vom Griffe

Montage af greb
Montering av grepp

Installatie van de grip
l'installation de poignées

NR 51 - 1

VR2279C

VR2279B

VR2279

A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 51 - 2

VR2279C

VR2279B

VR2279

A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

2.5 mm

NR 52 - 1

VR5277LK

VR5278

VR5269

38°C
100°F

NR 52 - 2

VR2279C

VR2279B

VR2279

A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 52 - 3

Anti scald settings
Verbrûschutz

Skoldningssikring
Skållnings skydd

Broeien verzekeringen
Prévention des brûlures

38°C
100°F

NR 52 - 4

VR2279C

VR2279

A

2.5 mm

NR 64 - 1

VR2279C

VR2279

A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

NR 64 - 2

VR2279C

VR2279


A

VR2279	16 mm	16 - 22 mm
VR2279B	12 mm	12 - 18 mm
VR2279C	8 mm	8 - 15 mm

2.5 mm

VOLA 070, 070R, 070-HT2


Fitting instruction
Montageanleitung
Monteringsvejledning
Monteringsvægledning
Montage hanleiding
Manuel de montage

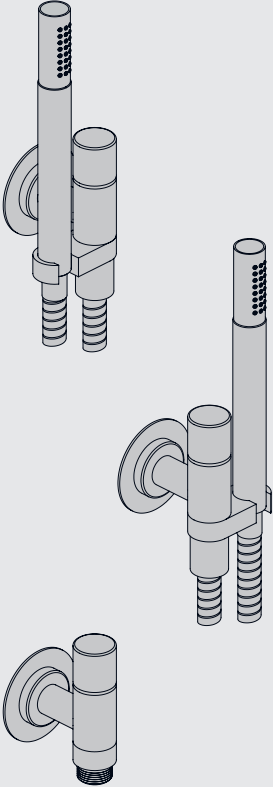


Data	Bar:	1	2	3	4	5
070/070R	(l/min) (Gal/min)	9 2.5	9 2.5	9 2.5	9 2.5	9 2.5
070-HT2	(l/min) (Gal/min)	9 2.5	12 3.2	15 4.0	17 4.5	19 5
	Max. 65°C. 150°F					




VR161:
VR161K: 7 l/min - 1.8 Gal/min (Cal Green)




070

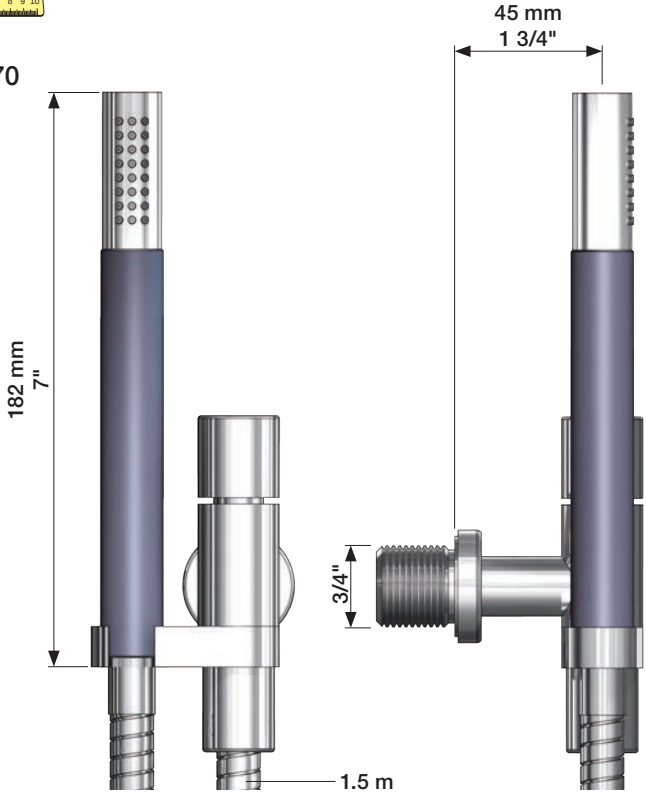


070R

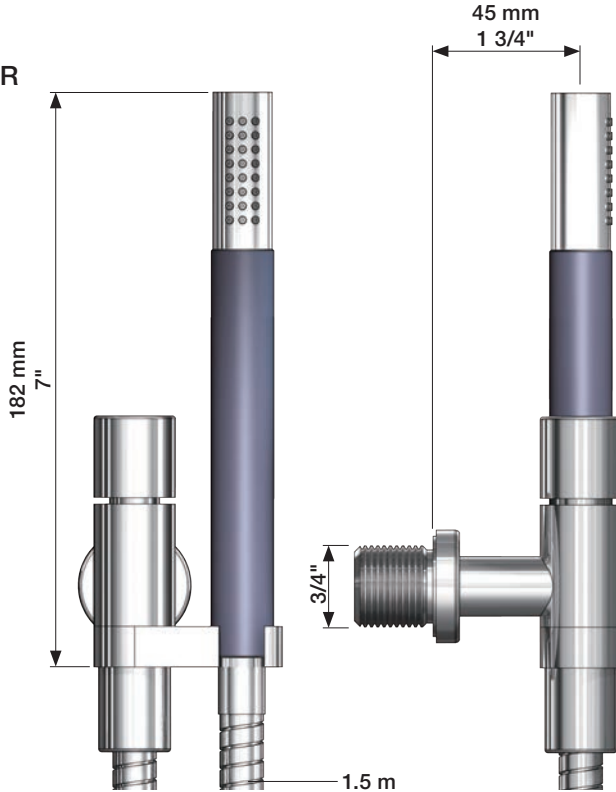


070-HT2

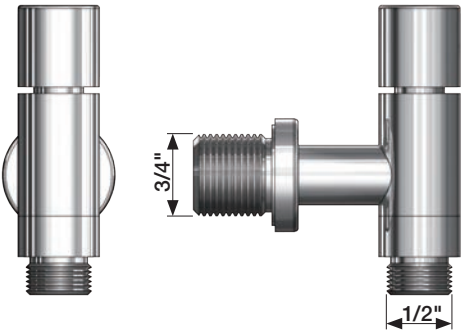


1

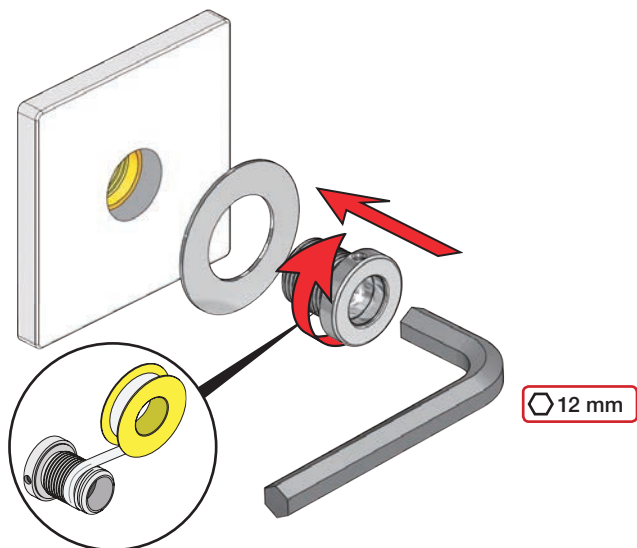

2

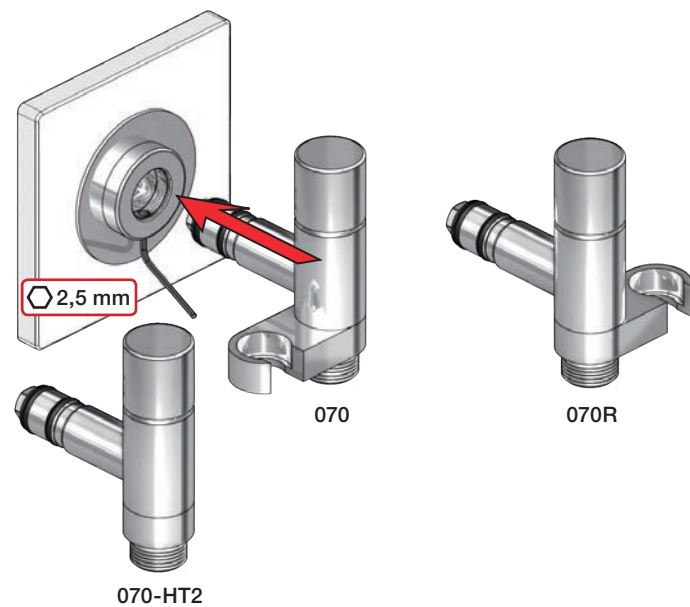


3

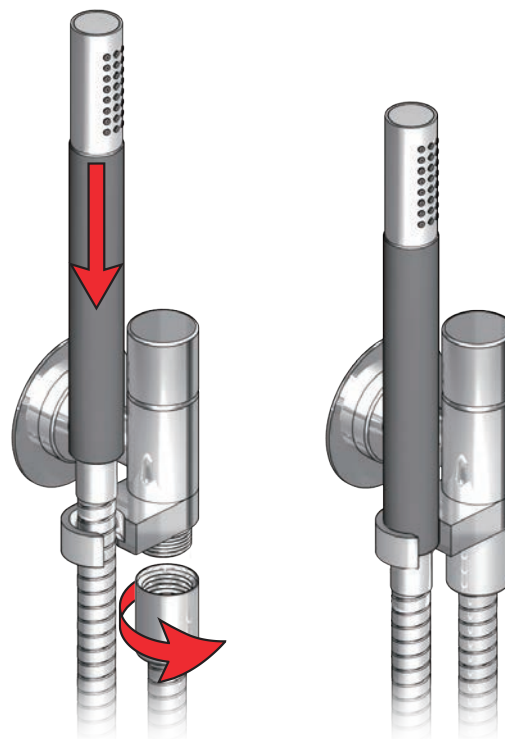

Extension
Verlängerung


Forlængerdele
Förlängning

Verlengstukken
Modification

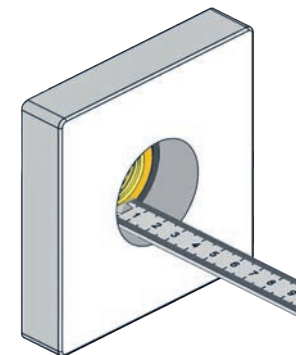

		VR2019: 
Tiles: Fliesen: Fliser: Fliser: Tegels: Carreaux:	3 - 15 mm	Standard
	15 - 25 mm	VR2019+10
	25 - 35 mm	VR2019+20
	35 - 45 mm	VR2019+30
	45 - 55 mm	VR2019+40
	55 - 65 mm	VR2019+50

VR2019+

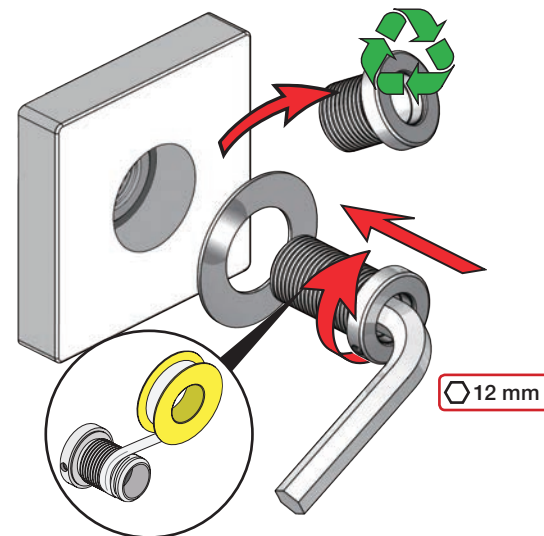


5400V

NR51: VR5251, VR2279+B+C, VR2A
NR52: VR5252, VR5253, VR5255, VR5256, VR2279+B+C, VR3113, VR2A
NR64: VR5251, VR2279+B+C, VR2A
VR5250+: VR5248+, VR5249+, VR5257, VR5258, VR5259, VR5260
VR5257+: VR5257+, VR5259+
VR5258+: VR5258+, VR5260+
VR5410+: 2xVR2C, VR5261+, VR5270+

VOLA 5400V
5400FV, 5400NV
5400RV, 5400TV
5600V

Date	Jan. 18
Rev.	4
Sheet	SB 10.54

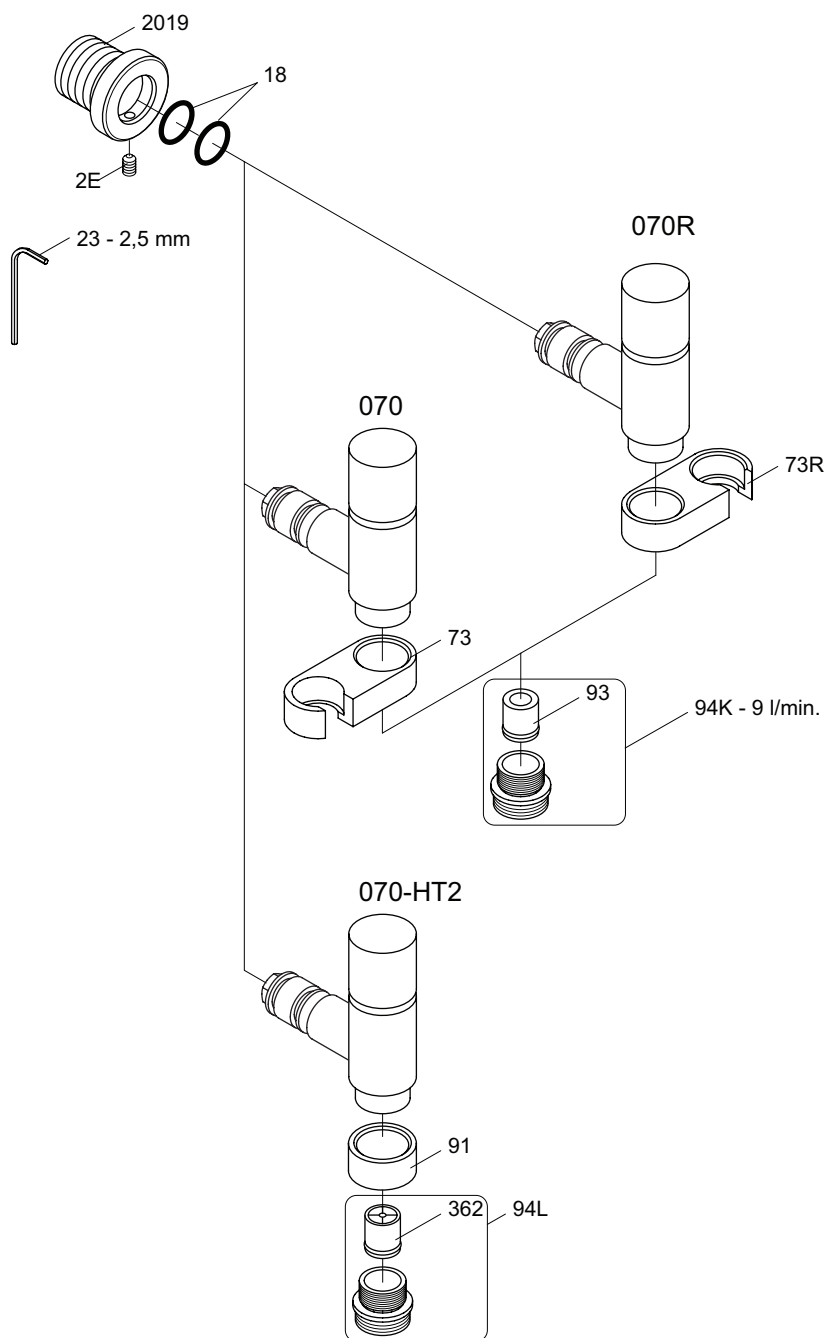

vola
 Lunavej 2
 DK-8700 Horsens
 Tlf : + 45 7023 5500
 Fax: + 45 7023 5511
 sales@vola.com
 www.vola.com

VOLA 070, 070R 070-HT2

Date
Jun. 15

Rev.
4

Sheet
SB 16