


Reinforcing sheet for drywall construction, for Geberit Duofix frame for wall-hung WC, width 50 cm

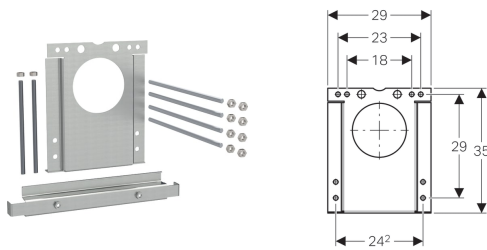

Application purposes

- For Geberit Duofix installation frames with a width of 50 cm
- For transmitting load forces to the WC ceramic appliance through the drywall to the frame
- For installation of Geberit Duofix frames for wall-hung WC behind the wall in the installation space
- For single-panelled or double-panelled drywalls made of plasterboard with or without core
- For drywalls with fire protection requirements

- For wall thicknesses of 3.6–10 cm

Characteristics

- Zinc-plated

Scope of delivery

- Retaining plate
- Crossbar
- 6 threaded rods M12
- 10 nuts M12

Art. no.

111.745.00.1



- For use with Geberit Duofix frames and IPS panel systems