
AXOR Starck Electronic basin mixer with temperature control battery-operated Surfaces: Chrome Article Number: 10101000


Description

- product features
- · ComfortZone 90
- · projection 103 mm
- · normal spray
- · flow rate at 3 bar: 5 l/min
- temperature adjustable via mixer lever on the side
- · suitable for continous flow water heaters
- · infrared sensor technology
- automatic environmental adjustment of infrared sensor
- adjustable optical range of infrared sensor (2 settings)
- battery operation 6 V (Lithium battery, lifetime approx. 2 years, battery included in scope of delivery)
- hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation)
- permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection)
- · manual water stop for washbasin cleaning
- performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm
- · functional restriction due to too large distance
- · connection dimension: DN15
- TÜV certified
- · dirt filters in the connection hoses

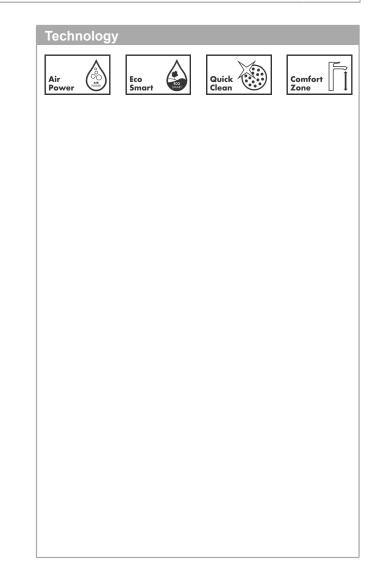


AXOR Starck Electronic basin mixer with temperature control battery-operated Surfaces: Chrome Article Number: 10101000

 Product image

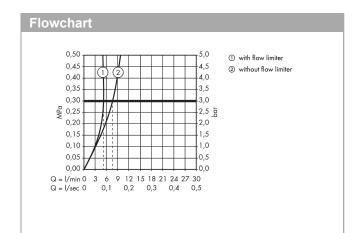


Scale drawing



AXOR Starck Electronic basin mixer with temperature control battery-operated Surfaces: Chrome Article Number: 10101000

Exploded Drawing

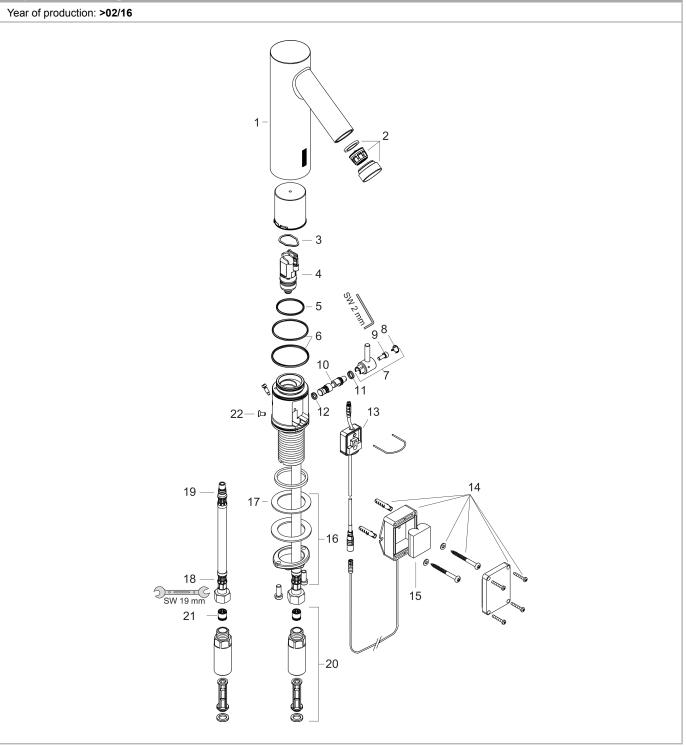

N

AXOR Starck Electronic basin mixer with temperature control battery-operated Surfaces: Chrome Article Number: 10101000

Spare part list Year of production: >02/16 Description PC PU Pos. **Article Number** mixer-hood aerator M24x1 (5 l/min) O-ring 17x2 solenoid valve O-ring 31x2 O-ring 41x2 sliding gear lever cover cap hexagon socket screw M4x10 mixing shaft O-ring 6x2 O-ring 5x2 electronics battery box battery fixing set (Ø 32) lever collar connection hose 450 mm M8x0,75 G3/8 O-ring 7x1,5 back flow preventor cartridge with microfilter non return valve DW 10 screw fixation extension 35 mm а b filter packing